

P19372.P01

**'UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

P19372

Total Pages

Inventor(s) or Application Identifier
Shinichi KAKIUCHI, Shuzo SEO, and Nobuhiro TANI

Title: THREE-DIMENSIONAL IMAGE CAPTURING DEVICE

jc803 U.S. PTO ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

ACCOMPANYING APPLICATION PARTS

1. ☒ Fee Transmittal Form
2. ☒ Specification [Total Pages 69]
(preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 27]
4. ☒ Oath or Declaration [Total Pages 4]
a. ☒ Newly executed (original or copy) ☐ Unexecuted
b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 18 completed)
[Note Box 5 below]
i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR 1.63(d)(2)
and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy
of the oath or declaration is supplied under Box 4b, is considered
as being part of the disclosure of the accompanying application
and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy
c. ☐ Statement verifying identity of above copies

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☒ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application,
Status still proper and desired
15. ☐ The prior application is assigned of record to _____
16. ☒ Foreign priority claimed
a. ☒ Claim of Priority
b. ☒ Certified Copies of Priority Document(s)
17. ☒ Other: Request for Approval of Proposed Drawing

Changes (with one sheet)

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No. _____/_____, filed _____.19. ☐ Amend the specification by inserting before the first line the sentence:

This application is a ___ continuation-in-part, ___ continuation, ___ division, of Application No. _____/_____, filed _____.

Address all future correspondence to Customer No. 7055 at the present address of:

GREENBLUM & BERNSTEIN, P.L.C.1941 Roland Clarke Place
Reston, VA 20191
(703) 716-1191

Date

Signature

Bruce H. Bernstein, Reg No. 29,027

Typed or Printed Name

P19372.A01

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Shunichi KAKIUCHI et al.
Appl. No. : Not Yet Assigned
Filed : Concurrently Herewith
For : THREE-DIMENSIONAL IMAGE CAPTURING DEVICE

PRELIMINARY AMENDMENT

Assistant Commissioner of Patents
Washington, D.C. 20231

Sir:

Prior to an examination of the above-identified patent application, the Examiner is respectfully requested to amend the specification and claims, as follows:

IN THE SPECIFICATION

Please amend the specification, as follows:

Page 34, line 7, change "S'36" to ---S47---;

lines 9-10, change "S26 shown in Fig. 9" to ---S39 shown in Fig. 10---; and

line 22, change "data transmitting operation" to ---data receiving operation---.

Page 40, line 3, after "operation", insert ---and therefore with no data transmitting operation---;

line 4, after "operation", insert ---and therefore with data transmitting---.

Page 53, line 25, change "D/V" to ---V/D---.

Page 55, line 17, change "one" to ---two---.

P19372.A01


REMARKS

The Examiner is respectfully requested to enter the foregoing amendment prior to an examination of the above-identified patent application.

The amendments to the specification made in this amendment have been made to correct minor errors and to make the specification self-consistent, and no estoppel should be deemed to attach thereto.

Should there be any questions, the Examiner is invited to contact the undersigned at the below-listed telephone number.

Respectfully submitted,
Shunichi KAKIUCHI et al.

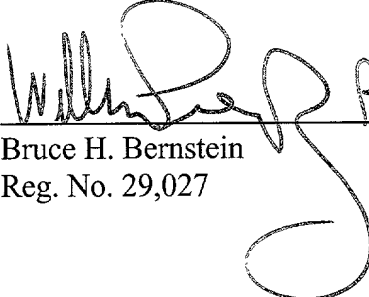 R.N. 23630
Bruce H. Bernstein
Reg. No. 29,027

July 28, 2000
GREENBLUM & BERNSTEIN, P.L.C.
1941 Roland Clarke Place
Reston, VA 20191
(703) 716-1191

THREE-DIMENSIONAL IMAGE CAPTURING DEVICE

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates to a three-dimensional image capturing device by which a three-dimensional shape of a measurement subject, which is to be measured, is captured by a time-of-flight measurement.

2. Description of the Related Art

10 To perform a three-dimensional image processing for a three-dimensional image comprised of an image data and three-dimensional data of a measurement subject, such data being obtained by an image information sensing operation and a distance information sensing operation of a three-dimensional image capturing device, a high image processing ability and a large storage capacity are required for the three-dimensional image capturing device. However, as the three-dimensional image capturing device is miniaturized, it is quite difficult to provide additional electric circuits and devices so as to obtain the above capability. Therefore, a conventional three-dimensional image capturing device is generally connected to a computer system, which is externally disposed, by an interface cable, for example, and detected data is transmitted via the cable, so that the three-dimensional image processing may be executed

15

20

25

for the data.

In order to obtain a three-dimensional image of the whole or arbitrary part of a measurement subject, a data composing operation to compose a plurality of image data and three-dimensional data, which is obtained by the sensing operations from various directions, is necessary. However, if the three-dimensional image capturing device is connected to the computer with the cable, a range of locations, in which the three-dimensional image capturing device can be operated, is limited, so that the sensing operations from various directions are difficult. Further, the cable also becomes an obstacle to the sensing operation and encumbers the handling of the device.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a miniaturized light weight handy three-dimensional image capturing device by which data can be efficiently transmitted to a device externally provided, such as a computer system, without connecting any type of cable between the devices.

According to the present invention, there is provided a three-dimensional image capturing device, comprising a first and second light source, an image device and a distance information sensing processor.

The first and second light source radiates a light beam and the image device accumulates signal charge

corresponding to a quantity of light received on the image device. The distance information sensing processor radiates a distance measuring light beam from the first light source to a measurement subject and detects distance information that relates to the measurement subject by receiving a reflected light beam from the measurement subject due to the distance measuring light beam on the image device. The data transmitting processor controls radiation at the second light source and radiates transmitting light beams, so that data is transmitted to an external device through space.

Preferably, the second light source is identical to the first light source. The pulse frequency-modulation bands of the distance measuring light beam and the transmitting light beam are different from each other, and the data comprises said distance information. Further, the device comprises an image sensing processor that detects image information of the measurement subject by forming an image of the measurement subject on the image device and the data comprises the image information. Furthermore, it may comprise a switching processor that switches on and off the drive of said transmitting processor.

Preferably, a series of the distance measuring light beams and a series of the transmitting light beams are further superposed. In this case, the distance information sensing processor may radiate the distance measuring light beams from

the first light source a predetermined number of times, so that signal charge is accumulated in the image device for each reiterated radiation. The timing for radiating the transmitting light beams is based upon the timing of the reiterated radiation of the distance measuring light beams.

In a preferable example, the series of the distance measuring light beams and the series of the transmitting light beams are superposed, so that the transmitting light beams are radiated in the intervals between the distance measuring light beams, and the transmitting light beams comprise a pulse beam that represents binary data in predetermined digits. Further, the distance measuring light beams and the transmitting light beams are superposed by pulse-width modulation of the light beams, so that the light beams comprise two types of pulse beams having different widths, which represent the binary data and are concurrently used for detecting the distance information. Furthermore, the distance measuring light beams may comprise a synchronizing signal of an optical transmission system.

In another preferable example of the present invention, an accumulation of the signal charge in the image device is synchronously carried out with the transmitting light beam, so that that transmitting light beam can be used as the distance measuring light beam as well, and by this, the transmitting light beams and the distance measuring light beams are

superposed with each other. The data sequence transmitted by the transmitting light beams may comprise a partition signal that delimits the data sequence by predetermined binary digits of the data.

5 The image device preferably comprises a plurality of photoelectric conversion elements that accumulates signal charge corresponding to a quantity of light received, and signal charge holding units disposed adjacent to each of the photoelectric conversion elements. The accumulation of the signal charge in the image device begins with a fall of an electric charge discharging signal that discharges the charge accumulated in the photoelectric conversion elements, and ends with a fall of an electric charge transfer signal that transfers the signal charge accumulated in the photoelectric conversion elements to the signal charge holding units. The electric charge transfer signal rises approximately simultaneously with the fall of the electric charge discharging signal.

10
15
20 Further, the electric charge transfer signal may be generated by conjunction of a standard electric charge transfer signal comprised of periodic pulse signals and a data synchronizing pulse signal generated synchronously with the fall of a pulse signal of the data sequence. Also, the electric charge discharging signal may be generated by
25 conjunction of the data synchronizing pulse signal and a

standard electric charge discharging signal, a period of which is the same as the standard electric charge transfer signal and from which the phase is delayed by a half period. The data synchronizing pulse signal may also be synchronized with the standard electric charge discharging signal and the pulse width of the data synchronizing pulse signal is the same as one period of the standard electric charge transfer signal.

Furthermore, there is a distance measuring period, in which the distance measuring light beams are repeatedly radiated the predetermined number of times, and it may comprise a data transmitting period and a supplement light emitting period. In the data transmitting period, the distance measuring light beams and the transmitting light beams are superposed and radiated. On the other hand, in the supplement light emitting period, the distance measuring light beams are radiated so as to supplement the number of the distance measuring light beams radiated in the data transmitting period, by the number deficient from the predetermined number of times.

Further, according to the present invention, there is also provided a receiver for use in an optical transmission system, a transmitter of which comprises a three-dimensional image capturing device, comprising a first and second light source, an image device that accumulates signal charge, a distance information sensing processor and a data transmitting processor.

measurement subject and the computer system, when the data transmitting operation is executed;

Fig. 4 is a view showing a principle behind a distance measurement;

5 Fig. 5 is a timing chart showing a distance measurement light beam, a reflected light beam, a gate pulse and a distribution of an amount of a light beam received by a CCD;

Fig. 6 is a plan view showing a disposition of photo-diodes and a vertical transfer unit, which are provided in the CCD of the first embodiment;

Fig. 7 is a sectioned elevational view of the CCD;

Fig. 8 is a timing chart of a distance information sensing operation by which data, corresponding to a distance from a camera body to each point on a surface of the measurement subject, is sensed in the first embodiment;

Fig. 9 is a timing chart of a distance correction information sensing operation in the first embodiment;

Fig. 10 is a timing chart of a reflectance information sensing operation in the first embodiment;

20 Fig. 11 is a timing chart of a reflectance correction information sensing operation in the first embodiment;

Figs. 12 shows the first part of a flowchart of the distance information sensing operation of the first embodiment;

25 Figs. 13 shows the second part of a flowchart of the

distance information sensing operation of the first embodiment;

Fig. 14 shows the third part of a flowchart of the distance information sensing operation of the first embodiment;

Fig. 15 shows a flowchart of the receiving operation in the optical transmission system of the first embodiment;

Fig. 16 is a perspective view showing a camera provided with a three-dimensional image capturing device of the second, third and fourth embodiment of the present invention;

Fig. 17 is a block diagram showing an electrical construction of the camera in the second and third embodiment;

Figs. 18 shows a flowchart of the distance information sensing operation of the second, third and fourth embodiment;

Fig. 19A shows a sequence of the pulse beam emission with no data transmitting operation in the second embodiment;

Fig. 19B shows a sequence of the pulse beam emission with the data transmitting operation of the second embodiment;

Fig. 20 is a flow chart of the data superposing operation in the second and third embodiment;

Fig. 21 is a flow chart of the receiving operation executed in the external computer system of the second and third embodiment;

Fig. 22 shows a sequence of the pulse beam emission with the data transmitting operation of the third embodiment;

Fig. 23 is a block diagram showing an electrical construction of the camera in the fourth embodiment;

Fig. 24 is a timing chart of a distance information sensing operation by which data, corresponding to a distance from a camera body to each point on a surface of the measurement subject, is sensed in the fourth embodiment;

Fig. 25 is a flow chart of the data superposing operation in the fourth embodiment;

Fig. 26 shows the detail of the CCD driving pulse converter and the blocks that relate to the data superposing operation in the block diagram shown in Fig. 23;

Fig. 27 is the sequence of the pulse signals output from the blocks shown in Fig. 26, during the data transmitting period;

Fig. 28 shows the sequence of the data transmitting period and the supplement light emitting period, which comprise the distance measuring period of the distance information sensing operation executed in the fourth embodiment;

Fig. 29 is the sequence of the pulse signals output from the blocks shown in Fig. 26, during the supplement light emitting period;

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is described below with reference to embodiments shown in the drawings.

Fig. 1 is an external view of a camera type optical reader (three-dimensional image capturing device) of a first embodiment of the present invention.

On a front surface of a camera body 10, a view-finder window 12 is provided toward a left-upper edge, adjacent to a photographing lens 11, and an electronic flash 13 is disposed toward a right-upper edge. On an upper surface of the camera body 10, a light emitting device (i.e., a light source) 14, which radiates a laser beam (an infrared laser beam, for example, being a distance measuring light beam) is mounted above the photographing lens 11. A release switch 15, a data transmitting mode button 24 and a liquid crystal display panel 16 are provided on a left side of the light emitting device 14, and a mode change dial 17 and a V/D mode switch 18 are provided on a right side of the device 14. On a side surface of the camera body 10, a card slot 19 is formed, into which a recording medium, such as an IC memory card, is insertable, and a video output terminal 20 and an interface connector 21 are also provided.

Fig. 2 is a block diagram showing an electrical construction of the camera of Fig. 1.

An aperture 25 is provided in the photographing lens 11. The opening degree of the aperture 25 is adjusted by an iris drive circuit 26. A focusing operation and a zoom operation of the photographing lens 11 are controlled by a lens drive

circuit 27.

An imaging device (CCD) 28 is disposed on an optical axis of the photographing lens 11. A subject image is formed on a light receiving surface of the CCD 28 through the photographing lens 11, and an electric charge corresponding to the subject image is generated therein. An operation, such as an accumulating operation and a reading operation of the electric charge of the CCD 28, is controlled by a CCD drive circuit 30. An electric charge signal, i.e., an image signal, read from the CCD 28 is amplified by an amplifier 31, and is converted from an analog signal to a digital signal by an A/D converter 32. The digital image signal is subjected to a process, such as a gamma correction, in the image signal process circuit 33, and is stored as digital image data in an image memory 34. The iris drive circuit 26, the lens drive circuit 27, the CCD drive circuit 30 and the image signal process circuit 33 are controlled by a system control circuit 35.

The digital image data are read from the image memory 34, and supplied to an LCD drive circuit 36, which is operated in accordance with the digital image data, so that an image corresponding to the digital image data is indicated on an image indication LCD panel 37.

The digital image data read from the image memory 34 are also transmitted to a TV signal encoder 38, so that the

digital image data can be transmitted to a peripheral monitor device (not shown), provided externally to the camera body 10, through a video output terminal (not shown), if necessary. The system control circuit 35 is connected to an interface circuit 40, which in turn is connected to an interface connector 21. Therefore, if there is a need, the digital image data read from the image memory 34 can also be transmitted to a computer (not shown) connected to the interface connector 21 by an interface cable. Further, the system control circuit 35 is connected to an image recording device 43 through a recording medium control circuit 42. Therefore, the digital image data read from the image memory 34 can be recorded in a recording medium M, such as an IC memory card, mounted in the image recording device 43. Note that the camera need not be connected to the computer with the interface cable. Namely, the image data can also be transmitted by the optical transmitting system described later. Further, the video output terminal is not essential.

A light emitting element control circuit 44 is connected to the system control circuit 35. The light emitting device 14 is provided with a light emitting element (laser diode (LD)) 14a and an illumination lens 14b, and an operation of the light emitting element 14a is controlled by the light emitting element control circuit 44. The light emitting element 14a radiates a laser beam, which is a distance

measuring light beam or a data transmitting light beam. In a distance information sensing operation, the laser beam irradiates a whole of a measurement subject through the illumination lens 14b, and in a data transmitting operation, the laser beam irradiates an area comprising a receiver of an optical transmitting system connected with the computer. In distance information sensing operation, the laser beam, reflected by the measurement subject, becomes incident on the photographing lens 11. By detecting the reflected laser beam with the CCD 28 provided with a plurality of photo-diodes, which are two-dimensionally disposed on a surface thereof, three-dimensional distance information is sensed as image data (three-dimensional image data), which is described later. The data, which is sensed by the CCD 28, is transmitted to a computer system by the optical transmitting system, which is executed with a light emitting operation of the light emitting element 14a. Note that in the above operations, a timing of signal charge transferring operations in the CCD 28 is controlled by the system control circuit 35 and the CCD drive circuit 30.

The liquid crystal display panel 16 and a switch group 45, including the release switch 15, the mode change dial 17, the V/D mode switch 18 and the data transmitting mode button 24, are connected to the system control circuit 35.

Fig. 3 schematically illustrates a disposition of the

camera body 10, the light emitting device 14, the receiver 47, the computer system 46 and the measurement subject S, wherein the distance information sensing operation, which detects the distance information relating to the distances from the camera body to each point on the surface of the measurement subject, and the data transmitting operation, which transmits the distance data and/or image data from the camera to the externally disposed device, such as the computer system 46 for example, are carried out.

The distance information sensing operation is carried out by radiating the distance measuring light beam from the light emitting device 14 to the measurement subject S, and receiving the reflected light beam, which is reflected by the measurement subject S and incident through the photographing lens 11, on the CCD 28. On the other hand, the data transmitting operation is carried out by receiving and detecting the data transmitting light beam with the receiver 47 disposed within the illuminating area U of the data transmitting light beam radiated from the light emitting device 14. The data transmitting light beam detected by the receiver 47 is converted to electric signal and transferred to the computer system 46 as received data. Then a predetermined image processing is performed to the received data and a three-dimensional image of the measurement subject is displayed on the monitor. Note that the distance measuring

light beam and the data transmitting light beam, radiated from the light emitting device 14, are pulse modulated laser beams. Further, a frequency-modulated band of data transmitting light beam is ten times higher than that of the distance measuring light beam, for example. Thus, each of the light beams is easily discriminated at the receiver 47, since each of the frequency-modulated bands is dissimilar from each other.

With reference to Figs. 4 and 5, a principle behind a distance measurement in the embodiment is described below. Note, in Fig. 5, the abscissa indicates time "t".

A distance measuring light beam output by a distance measurement device B is reflected by a measurement subject S, and the reflected light beam is sensed by a CCD (not shown). The distance measuring light beam is a pulse, the width of which is "H". Accordingly, the reflected light beam is a pulse, the width of which is "H", similarly to the distance measuring light beam. Therefore, a rise of the pulse of the reflected light beam occurs after a rise of the pulse of the distance measuring light beam by a time $\delta \cdot t$ (δ is a delay coefficient). Since the distance measuring light beam and the reflected light beam have both traveled a distance "r" between the distance measurement device B and the measured subject S, the distance "r" is represented as follows:

$$r = \delta \cdot t \cdot C/2 \quad \dots (1)$$

wherein "C" is the speed of light.

For example, by setting a condition in such a manner that the reflected light beam can only be sensed from a rise of the pulse of the distance measuring light beam to a point prior to a fall of the pulse of the reflected light beam, i.e., by providing a gate pulse corresponding to a reflected light beam detecting period T, an amount "A" of received light from the reflected light beam becomes a function of the distance "r". Namely, the greater the distance "r" (or the greater the time $\delta \cdot t$), the less the received light amount A.

In the embodiment, by taking advantage of the principle described above, the received light amount A is sensed using each of the photo-diodes (photoelectric conversion elements) of the CCD 28, the distance from the camera body 10 to each point on the surface of the measurement subject S is sensed, and data relating to the three-dimensional image, which indicates the topography of the measurement subject S, can be obtained.

Fig. 6 is a plan view showing a disposition of the photo-diodes 51 and a vertical transfer unit 52, which are provided in the CCD 28. Actually, a multitude of photo-diodes 51 are arranged in a matrix, and a corresponding vertical transfer unit 52 is disposed beside each vertical column of photo-diodes 51. Fig. 7 is a sectioned elevational view of

the CCD 28 in which the CCD 28 is cut by a plane perpendicular to a substrate 53. The CCD 28 is an interline CCD of vertical overflow drain (VOD) type, in which unwanted charge is discharged to the substrate 53.

5 The photo-diodes 51 and the vertical transfer unit (signal charge holding unit) 52 are formed along a surface of the n-type substrate 53. A plurality of the photo-diodes 51 are two-dimensionally disposed in a matrix arrangement, and the vertical transfer unit 52 is disposed adjacent to the photo-diodes 10 51, parallel to rows extending in a vertical direction in Fig. 5. The vertical transfer unit 52 has four vertical transfer electrodes 52a, 52b, 52c and 52d, which correspond to each of the photo-diodes 51. Therefore, in the vertical transfer unit 15 52, four potential wells can be formed, so that a signal charge is output from the CCD 28 by controlling a depth of the wells, as is well known. Note that a number of the vertical transfer electrodes can be changed, depending upon the requirement of the CCD 28.

20 The photo-diodes (PD) 51 and the vertical transfer unit (V-CCD being signal charge holding unit) 52 are disposed in a p-type well formed on a surface of the substrate 53. The p-type well is completely depleted due to an inverse bias voltage applied between the p-type well and the n-type substrate 53. In this state, electric charge is accumulated in the photo-diodes 51, 25 and an amount of the electric charge corresponds to an amount

of an incident light beam, which is the reflected light beam reflected by the measurement subject. When a substrate voltage is changed to a value greater than a predetermined value, electric charge accumulated in the photo-diodes 51 is discharged to the substrate 53. Conversely, when an electric charge transfer signal, which is a voltage signal, is applied to a transfer gate (TG) 54, the electric charge accumulated in the photo-diodes 51 is transferred to the vertical transfer unit 52. Namely, after the electric charge is discharged to the substrate 53 by the electric charge discharging signal, the signal charge accumulated in the photo-diode 51 is transferred to the vertical transfer unit 52 by the electric charge transfer signal. By repeating the discharge and the transfer, an electronic shuttering operation is performed.

Fig. 8 is a timing chart of a distance information sensing operation by which data, corresponding to the distance from the camera body 10 to each point on a surface of the measurement subject, is sensed. The distance information sensing operation is described below with reference to Figs. 1, 2, 6, 7 and 8. Note that the timing chart of the distance information sensing operation in the present embodiment is slightly different from the timing chart of the distance measurement principle, which was described above with reference to Fig. 5. Namely, the timing chart of the present embodiment is set so as to sense the reflected light beam

from a point subsequent to the rise of the reflected light beam pulse to a point subsequent to the fall. By this manner, a noise component due to an ambient daylight may be reduced, though the principles of the above distance measurement means are basically the same.

In synchronization with an output of a vertical synchronizing signal (not shown), an electric charge discharging signal (a pulse signal) S1 is output, so that unwanted charge, which is accumulated in the photo-diodes 51, is discharged to the substrate 53. The electric charge value, while the pulse signal S1 is output, is indicated as S2 in the chart. After the electric charge discharging signal S1 is output, the light emitting device 14 is actuated, and thus a distance measuring light beam S3, which is a pulsed beam having a constant width T_s , is output therefrom. A period for outputting the distance measuring light beam S3 or the width of the pulse beam is modulated according to a requirement. In the present embodiment, the distance measuring light beam S3 is modulated as to be completed approximately simultaneously with a completion of the output of the electric charge discharging signal S1.

The distance measuring light beam S3 is reflected by the measurement subject, and enters the CCD 28 as a reflected light beam S4. When the output of the electric charge discharging signal S1 ends, the electric charge for incident

light, which comprises the reflected light beam S4 and an ambient daylight, starts on each of the photo-diodes and a signal charge S5 is sensed. When an incident of the reflected light beam S4 is completed, i.e. after the fall indicated with a reference sign S6, the photo-diodes only generate signal charge S8 due to the ambient daylight.

An electric charge transfer signal (pulse signal) S9 is output only to the vertical transfer electrodes 52a, and an electric charge accumulated in the photo-diodes 51 are transferred to the vertical transfer unit 52. The operation of transferring the accumulated electric charge in the photo-diodes 51 ends with the fall S10, which is a termination of the output of the electric charge transfer signal S9. Namely, a signal charge S11 of which electric signal accumulation was started just after the completion of the electric charge discharging signal output and terminated just after the completion of the output of the electric transfer signal S9, is transferred to the vertical transfer unit 52, while the photo-diodes continue to accumulate electric signals S14 due to the ambient daylight.

Thus during a period T_{U1} from the end of the output of the electric charge discharging signal S1 to the end of the output of the electric charge transfer signal S9, a signal charge S11, corresponding to distances from the camera body 10 to the measurement subject and the ambient daylight is

accumulated in the photo-diodes 51. Namely, the signal charge S12, a hatched portion of signal charge S11, corresponds to the distances from the camera body 10 to the measurement subject, while a residual portion S13 of the signal charge S11 results from the ambient daylight.

When a predetermined time has elapsed since the output of the electric charge transfer signal S9, a subsequent electric charge discharge signal is output, so that the signal charge S14, an electric charge accumulated in the photo-diodes after the signal charge transfer to the vertical transfer unit 52, is discharged to the substrate 53. Subsequently, another signal charge is accumulated in the photo-diodes 51. Then, similarly to the above description, when the electric charge accumulation period T_{U1} has again elapsed, the signal charge S11 is transferred to the vertical transfer unit 52.

The transferring operation of the signal charge S11 to the vertical transfer unit 52 is repeatedly performed until the next vertical synchronizing signal (not shown) is output. Thus, the signal charge S11 is integrated in the vertical transfer unit 52. The signal charge S11 integrated for one field period, which is between two vertical synchronizing signals, corresponds to distance information of the measurement subject, on condition that the measurement subject is stationary for the period between the two vertical synchronizing signals.

The detecting operation of the signal charge S11 described above is carried out in all of the photo-diodes 51 provided in the CCD 28. As a result of the detecting operation for one field period, the distance information sensed by the photo-diodes 51 is held in each corresponding vertical transfer unit 52, which is located adjacent to each column of photo-diodes 51. The distance information is output from the CCD 28 by a vertical transferring operation of the vertical transfer units 52 and a horizontal transferring operation of a horizontal transfer unit (not shown). The distance information is then output from the CCD 28.

The reflected light beam detected by the CCD 28 is affected by the reflectance of the surface of the subject. Therefore, the distance information obtained through the reflected light beam contains error derived from the reflectance. Further, the light beam sensed by the CCD 28 may contain an extra component, such as ambient daylight, being other than the reflected light beam from the measurement subject, which can cause an error. A description for methods of correcting such errors are given in the following, as a part of a flowchart showing the distance information sensing operation and data transmitting operation.

Fig. 12 through Fig. 14 are a flow chart of the distance information sensing operation and data transmitting operation executed in the camera of the first embodiment. Fig. 9 through

Fig. 11 are respective timing charts of a distance correction information sensing operation, a reflectance information sensing operation and a reflectance correction information sensing operation of the first embodiment.

5 When it is recognized in Step 101 that the release switch 15 is fully depressed, Step 102 is executed in which it is determined which mode is selected, a video (V) mode or a distance measurement (D) mode. A change between the modes is carried out by manually operating the V/D mode switch 18.

10 When the D mode is selected, Step 103 is executed in which the vertical synchronizing signal is output and a distance measuring light beam control is started. Namely, the light emitting device 14 is driven so that the distance measuring light beam S3 is intermittently output as a pulsed beam. Then, Step 104 is executed so that a sensing operation control of the CCD 28 is started. Namely, the distance information sensing operation described with reference to Fig. 8 is started, and thus the electric charge discharging signal S1 and the electric charge transfer signal S9 are alternately output, so that the signal charge S11 of the distance information is integrated in the vertical transfer unit 52.

20 In Step 105, it is determined whether one field period has elapsed since the beginning of the distance information

25

sensing operation, i.e., whether a new vertical synchronizing signal has been output. When one field period has passed, the process goes to Step 106 in which the signal charge S11 of the distance information is output from the CCD 28. The signal charge S11 is then temporarily stored in the image memory 34 in Step 107. Then, in Step 108, the distance measuring light beam control is turned OFF, and thus the light emitting operation of the light emitting device 14 is terminated.

In Steps 109 through 112, the distance correction information sensing operation is performed. In Step 109, a vertical synchronizing signal is output, and a sensing operation control of the CCD 28 is started. Namely, as shown in Fig. 9, an electric charge discharging signal S21 and an electric charge transfer signal S22 are alternately output while the light emitting operation of the light emitting device 14 is not carried out, i.e., while the light source is not illuminated. Although the electric charge accumulation period T_{U1} is the same as that of the distance information sensing operation shown in Fig. 8, the distance measuring light beam does not irradiate the measurement subject (reference S23), and thus there is no reflected light beam (reference S24). Therefore, although a signal charge of the distance information is not generated, a signal charge S25 corresponding to an interference or noise component is

generated, since the noise component, such as ambient daylight, enters the CCD 28. When an electric charge transfer signal S22 is output, a signal charge S26, a charge accumulated during the electric charge accumulation period T_{u1} , is transferred to the vertical transfer unit 52. The signal charge S26 corresponds to distance correction information, which is used for correcting an error generated in the distance information due to the noise component, and is related to the electric charge accumulation period T_{u1} .

In Step 110, it is determined whether one field period has elapsed since the beginning of the distance correction information sensing operation, i.e., whether a new vertical synchronizing signal has been output. When one field period has passed, the process goes to Step 111 in which the signal charge S26 of the distance correction information is output from the CCD 28. The signal charge S26 is then temporarily stored in the image memory 34 in Step 112.

In Steps 113 through 117, the reflectance information sensing operation is performed. In Step 113, a vertical synchronizing signal is output, and a distance measuring light beam control of the CCD 28 is started. Namely, as shown in Fig. 10, a distance measuring light beam S33 is intermittently output as a pulsed beam. In Step 114, a sensing operation control of the CCD 28 is started, and thus an electric charge discharging signal S31 and an electric charge transfer signal

S35 are alternately output. The electric charge of photo-diodes is discharged (reference S32) as the electric charge discharge signal S31 is output. After completion of an output of the electric charge discharge signal S31, a distance measurement light beam S33 is emitted from the light emitting device 14, and a reflected light beam S34 is made incident on the CCD 28. An electric charge transfer signal S35 is output after a period sufficient to detect the entire reflected light beam S34. Namely, the reflectance information sensing operation is controlled in such a manner that all of the reflected light beam S34 is received within an electric charge accumulation period T_{U2} , which is from an end of an output of the electric charge discharging signal S31 to an end of an output of the electric charge transfer signal S35. Note that, a width T_s of the signal charge S33 accumulated in each of the photo-diodes 51 of the CCD 28 is the same as a width T_s of the distance measuring light beam S33.

During a period in which all of the reflected light beam S34 is sensed, a signal charge S36 accumulated in the photo-diodes 51 is due to the reflected light beam S34 and the ambient daylight. The signal charges S37 and S38 are charges generated only by the ambient daylight. When the electric charge transfer signal S35 is output, the signal charge S39 is transferred to the vertical transfer unit 52.

Therefore, the signal charge, which is detected during the electric charge accumulation period T_{u2} , including the signal charge $S'39$ generated by the ambient daylight, does not depend upon the distance of the measurement subject, and corresponds to the reflectance information which depends on the reflectance of the surface of the measurement subject.

In Step 115, it is determined whether one field period has elapsed since the beginning of the reflectance information sensing operation, i.e., whether a new vertical synchronizing signal has been output. When one field period has passed, the process goes to Step 116 in which the signal charge $S39$ of the reflectance information is output from the CCD 28. The signal charge $S39$ is then temporarily stored in the image memory 34 in Step 117. Then, in Step 118, the distance measuring light beam control is turned OFF, and thus the light emitting operation of the light emitting device 14 is terminated.

In Steps 119 through 122, the reflectance correction information sensing operation is performed. In Step 119, a vertical synchronizing signal is output, and a sensing operation control of the CCD 28 is started. Namely, as shown in Fig. 11, an electric charge discharging signal $S41$ and an electric charge transfer signal $S42$ are alternately output while the light emitting operation of the light emitting device 14 is not carried out. Although the electric charge

accumulation period T_{U2} is the same as that of the reflectance information sensing operation shown in Fig. 10, the distance measuring light beam does not irradiate the measurement subject (reference S43), and thus there is no reflected light beam (reference S44). Therefore, although a signal charge of the reflectance information is not generated, a signal charge S46 corresponding to an interference component or a noise component is generated, since the noise component, such as ambient daylight, enters the CCD 28. A signal charge S47 is a charge accumulated during the electric charge accumulation period T_{u2} and is transferred to the vertical transfer unit 52 by the electric charge transfer signal S42. The signal charge S47 corresponds only to reflectance correction information, which is used for correcting an error generated in the reflectance information due to the noise component, and is related to the electric charge accumulation period T_{U2} .

In Step 120, it is determined whether one field period has elapsed since the beginning of the reflectance correction information sensing operation, i.e., whether a new vertical synchronizing signal has been output. When one field period has passed, the process goes to Step 121 in which the signal charge S46 of the reflectance correction information is output from the CCD 28. The signal charge S47 is temporarily stored in the image memory 34 in Step 122.

In Step 123, a calculation process of the distance measurement (D) data is performed using the distance information, the distance correction information, the reflectance information and the reflectance correction information, which are obtained in Steps 103 through 122. The D data is output and stored in the image memory 34 in Step 124. The distance information sensing operation ends with Step 124 and the data transmitting operation then starts. The data transmitting operation is shown in the following steps of Step 128. Conversely, when it is determined in Step 102 that the V mode is selected, the distance measuring light beam control is turned OFF in Step 125, and a normal photographing operation (i.e., CCD video control) is turned ON. Then, the image of the measurement subject is sensed and the corresponding image data is stored in the image memory 34 at step 127. By this, the image sensing operation or photographing operation ends and the data transmitting operation is executed in the steps succeeding Step 128.

In Step 128 through Step 130, the data transmitting operation is performed. In Step 128, it is determined whether the data transmitting mode is set. When it is determined that the data transmitting mode is set, the process proceeds to Step 129. On the other hand, when it is determined that the data transmitting mode is not set, the data stored in the image memory 34 are recorded in the recording medium M

in Step 131, then process returns to Step 101. The data transmitting mode is set by manually operating the data transmitting mode button 24. Namely, when the data transmitting button 24 is pressed, the data transmitting mode is set, and when it is pressed once more, the mode is canceled.

In Step 129, it is determined whether preparations for the data transmission are complete. When the preparations are complete, at Step 130 the pulse modulated data transmitting light beams, which is modulated according to the modulation signal of the data, are radiated from the light emitting device 14. When the entire data is transmitted to the computer system 36, the process returns to Step 101 and the process stands by until the release switch 15 is fully depressed. On the other hand, at Step 129 when it is determined that the preparation for the data transmitting is not complete, the process stands by at Step 129.

Next, with reference to Figs. 8 through 11, the contents of the calculation executed in Step 123 is described below.

It is supposed that the measurement subject of reflectance R is illuminated and an image of the measurement subject is formed on the CCD 28 while regarding the measurement subject to be a two-dimensional light source. At this time, an output S_n , which is obtained by integrating an electric charge generated in a photo-diode for an electric charge accumulation period " t ", is indicated as follows:

$$S_n = k \cdot R \cdot I \cdot t \quad \dots (2)$$

wherein "k" is a proportional coefficient, which is varied in accordance with an F-number and a magnification of the photographing lens.

When the measurement subject is illuminated by light output from a light source, such as an infrared laser source, the luminance I is obtained by combining a luminance I_s , due to the light source and a luminance I_B due to the ambient light, which is indicated as follows:

$$I = I_s + I_B \quad \dots (3)$$

As shown in Fig. 8, it is supposed that the electric charge accumulation period is T_{U1} , the pulse width of the distance measuring light beam S3 is T_s , a pulse width of the signal charge S6 of the distance information is T_D , and the electric charge accumulation period is repeated N times (a predetermined number of times) for one field period. An output SM_{10} of the CCD is:

$$\begin{aligned} SM_{10} &= \sum (k \cdot R (I_s \cdot T_D + I_B \cdot T_{U1})) \\ &= k \cdot N \cdot R (I_s \cdot T_D + I_B \cdot T_{U1}) \quad \dots (4) \end{aligned}$$

wherein the pulse width T_D is indicated as follows:

$$\begin{aligned} T_D &= \delta \cdot t \\ &= 2r/C \quad \dots (5) \end{aligned}$$

As shown in Fig. 10, when the electric charge accumulation period T_{U2} is greater than the pulse width T_s , such that the electric charge accumulation period T_{U2} is large

enough to receive the whole of the reflected light beam, an output SM_{20} of the CCD is:

$$\begin{aligned} SM_{20} &= \sum (k \cdot R (I_S \cdot T_S + I_B \cdot T_{U2})) \\ &= k \cdot N \cdot R (I_S \cdot T_S + I_B \cdot T_{U2}) \end{aligned} \quad \dots (6)$$

As shown in Fig. 9, when the light beam is turned OFF to carry out a pulse-shaped electric charge accumulation, having a same width as that of Fig. 8 an output SM_{11} of the CCD is:

$$\begin{aligned} SM_{11} &= \sum (k \cdot R \cdot I_B \cdot T_{U1}) \\ &= k \cdot N \cdot R \cdot I_B \cdot T_{U1} \end{aligned} \quad \dots (7)$$

Similarly, an output S_{11} of the CCD, which is obtained when an electric charge accumulation shown in Fig. 11 is performed, is

$$\begin{aligned} SM_{21} &= \sum (k \cdot R \cdot I_B \cdot T_{U2}) \\ &= k \cdot N \cdot R \cdot I_B \cdot T_{U2} \end{aligned} \quad \dots (8)$$

Based on the formulas (4), (6), (7) and (8), a following formula is obtained:

$$\begin{aligned} S_D &= (SM_{10} - SM_{11}) / (SM_{20} - SM_{21}) \\ &= T_D / T_S \end{aligned} \quad \dots (9)$$

As described above, the distance measuring light beam S3 and the reflected light beam S4 contain noise, such as ambient daylight (i.e., a luminance I_B due to ambient daylight). T_D / T_S included in the formula (9) indicates that an amount of the reflected light beam S4 from the measurement subject, when the distance measuring light beam S3 is radiated, is

normalized by an amount of the distance measuring light beam S3, and is equal to a ratio of a value in which the noise component (SM_{11}) (corresponding to the electric charge S26 shown in Fig. 9) is subtracted from the amount of the distance measuring light beam S3 (SM_{10}) (corresponding to the signal charge S11 shown in Fig. 8), to a value in which the noise component (SM_{21}) (corresponding to the electric charge S'36 shown in Fig. 11) is subtracted from an amount of the reflected light beam S4 (SM_{20}) (corresponding to the signal charge S26 shown in Fig. 9).

SM_{10} , SM_{11} , SM_{20} and SM_{21} included in the formula (9) are stored as the distance information, the distance correction information, the reflectance information and the reflectance correction information, in Steps 107, 112, 117 and 122, respectively. Therefore, based on the information, T_D/T_S is obtained. Since the pulse width T_S is known, the distance r is obtained from formula (5) and T_D/T_S . Thus, based on the formula (5) and (9), the distance r from the camera body to each point on the surface of the measurement subject is corrected, so that an accuracy of a distance sensing is improved.

Fig. 15 is a flow chart of a data transmitting operation executed on the computer system 46.

The receiver 47 is initially set to detect a distance measuring light beam. Namely, a frequency modulated laser

beam in the band of the distance measuring light beam is only detectable. When the receiver 47 detects a distance measuring light beam in Step 201, the process proceeds to Step 202, in which a timer is set. In Step 203, it is determined whether a predetermined time has passed since the timer was set. When the predetermined time has not elapsed, it is then determined whether the data transmission has started. Namely, it is checked whether the receiver 47 has detected a data transmitting light beam, a band of which is ten times, for example, that of the distance measuring light beam. If a data transmitting light beam has not been detected, the process goes to Step 203, and it is again determined whether the predetermined time has elapsed since the timer was set. When the elapsed time of the timer is beyond the predetermined time, the process returns to Step 201, and prepares for the subsequent distance measuring light beam, which may be detected.

In Step 204 when a transmission start signal of the data transmitting light beam, for example, is detected by the receiver 47, so that it is determined that the data transmission has started, then in Step 205, the data transmitting light beams, which are transmitted from the light emitting device 14 of the camera in Step 130, are detected by the receiver 47 and are input to the computer system 46 as distance data and image data. In Step 206, it is determined

whether a detected light beam, for example, corresponds to a transmission end signal. When the detected light beam corresponds to the transmission end signal, the receiving operation is terminated and the process returns to Step 201, at which the process stands by until the subsequent distance measuring light beam is detected. When the detected light beam is not the transmission end signal, the process returns to Step 205 and the succeeding light beam is detected.

As described above, according to the first embodiment, the miniaturized light weight handy three-dimensional image capturing device, which can transmit data to the computer system with no cable between, is obtained.

Fig. 16 is a perspective view of a camera type optical reader (three-dimensional image capturing device) of a second embodiment of the present invention. The external view of the camera in the second embodiment is the same as that of the first embodiment except for the data transmitting mode button 24, which is shown in Fig. 1.

Fig. 17 is a block diagram showing an electrical construction of the camera of Fig. 16. Most of the structure, which is shown in Fig. 17, is the same as the structure shown in Fig. 2, which describes the electrical construction of the camera in the first embodiment. However, the camera in the second embodiment has a data pulse generating circuit 29, which generates data pulses and superposes the pulses

onto an LD driving pulse. Namely, the light emitting element control circuit 44 is controlled by the system control circuit 35 through the data pulse generating circuit 29.

Fig. 18 is a flow chart of a distance information sensing operation and a data transmitting operation executed in the second embodiment. The above operations are executed in the arrangement illustrated in Fig. 3.

In the second embodiment, the signal charge S13, shown in Fig. 8, due to the ambient daylight is ignored, since the amount of signal charge S13 is regarded as small enough to ignore when it is compared with the amount of signal charge S12. Further, influence of the reflectance information is also omitted so as to simplify the description. Namely, in the second embodiment, the distance correction information sensing operation, the reflectance information sensing operation and the reflectance correction information sensing operation, which are executed in the first embodiment, are omitted. Therefore, the process described from Step 109 to Step 122 in Fig. 12 and Fig. 13 is reduced. Note that, the above three operations may be carried out additionally if required.

When switch 15 is fully depressed in Step 301, then Step 302 is executed in which it is determined which mode is selected, a video (V) mode or a distance measurement (D) mode.

When the D mode is selected, a data superposing operation, which is described later, is executed in Step 303. In Step 304, the vertical synchronizing signal is output and a distance measuring light beam control is started. Namely, the light emitting device 14 is driven so that the distance measuring light beam S3 is intermittently output as a pulsed beam. Subsequently, Step 305 is executed so that a sensing operation control of the CCD 28 is started. Namely, the distance information sensing operation is started, and the signal charge S11 (see Fig. 8) of the distance information is integrated in the vertical transfer unit 52, as described in the first embodiment.

In Step 306, it is determined whether one field period has elapsed since the beginning of the distance information sensing operation, i.e., whether a new vertical synchronizing signal has been output. When one field period has not passed, the process returns to Step 303. On the contrary, when one field period has passed, the process goes to Step 307 in which the signal charge S11 of the distance information is output from the CCD 28. The signal charge S11 is then temporarily stored in the image memory 34 in Step 308. In Step 309, the distance measuring light beam control is turned OFF, and thus the light emitting operation of the light emitting device 14 is terminated. With the above operations, signal charge S11, due to each reiterated radiation, is accumulated in the

CCD 28 for a predetermined number of times or one field period.

In Step 310, a calculation process of the distance measurement (D) data is performed using the distance information, which is obtained in Steps 304 through 308. The D data is output and stored in the image memory 34 in Step 311. Conversely, when it is determined, in Step 302, that the V mode is set, the process goes to Step 312. In Step 312, the distance measuring light beam control is turned OFF, and a normal photographing operation (i.e., CCD video control) is turned ON, in Step 313. Then, the image of the measurement subject is sensed and the corresponding image data is stored in the image memory 34 in step 314, and the process returns to the first step, Step 301.

Note that, the contents of the calculation process for the distance measurement (D) data, which is executed in Step 310, is similar to the contents described in the first embodiment. Namely, D data is obtained from the formula (4) and (5) with I_B assumed to be zero in the formulas, and the reduced formula is described in the following form.

$$r = C \cdot SM_{10} / (2 \cdot K \cdot N \cdot R \cdot I_s) \quad \dots (10)$$

Next, the process of the data superposing operation, which is executed in Step 303, is described with reference to Fig. 18 through Fig. 21.

Each of Fig. 19A and Fig. 19B describes a sequence of the pulse beam radiation at the light emitting device 14,

with reference to the accumulating period of the signal charge in the CCD. Fig. 19A shows a sequence of the pulse beam with no data superposing operation, and Fig. 19B shows the sequence with the data superposing operation.

5 As for the timing of the accumulation of signal charge and the radiation of the distance measuring light beam S51, there is no difference between the operation (corresponding to Fig. 19B) with the data superposing process and the operation (corresponding to Fig. 19A) without the data
10 superposing process. However, in the case of the operation with the data superposing, a set of pulse beam signals S52 that correspond to the transmitting data is radiated for a data period T_d , an interval between the subsequent radiations of the distance measuring light beams S51. Namely, an
15 accumulation of the signal charge in a photo-diode 51, which continues for the period T_{U1} , approximately simultaneously begins with a fall of the distance measuring light beam S51. When a predetermined time elapses from the completion of the accumulation in the photo-diodes 51, the pulse beams S52,
20 which represent the transmitting data, are radiated for the period T_d . After a predetermined interval, a blank period T_b , from the end of the data period T_d , in which a set of the pulse beam S52 is radiated, the subsequent distance measuring light beam S51 is emitted. Thus, the period $(T_d + T_b)$, which
25 is composed of the data period T_d and the blank period T_b ,

is comprised in the interval between the fall of the electric charge transfer signal S 10 and the fall of the electric charge discharging signal (refer Fig. 8). The above operations continuously repeat until one field period elapses. Note that, the data transmitted in the above operations are distance data or image data, the data of which is sensed in the distance information sensing operation and stored in the image memory 34. Further, the data may comprise control data as required.

Each set of pulse beams S52, which is illustrated in Fig. 19B, represents 8 bits data, which corresponds to the binary number indicated under each of the pulse beams, as an example. Namely, data period T_d is equally divided into eight intervals, and each interval corresponds to a binary digit. If there is a radiation of a pulse beam during an interval corresponding to a digit of an 8 bits number, the corresponding digit is "1", and if not, it is "0". Further, the distance measuring light beam S51 is also used as a synchronizing signal for the transmitting operations between the camera and the computer system, and each set of pulse beams S52 is emitted from the light emitting device when a predetermined period elapses from an end of each accumulating period T_{U1} .

Fig. 20 is a flow chart of the data superposing operation which is executed in Step 303 of the flow chart described in Fig. 18. The data superposing operation is

carried out when it is determined that the mode is set to D mode, in Step 302 of Fig. 18. In Step 401, a determination is made to confirm the existence of data to be transmitted. If there is data to be transmitted, in Step 402, an 8 bits data is read out from the image memory 34 and transformed to the signal which is to be superposed onto an LD driving pulse for driving the light emitting device (LD) 14. Then, data pulse that represents the 8 bits transmitting data is superposed onto the LD driving pulse and output from the data pulse generating circuit 29 in Step 403, and the process for data superposing operation for one set (8 bits) of data ends. On the contrary, when it is determined, in Step 401, that there is no data to be transmitted, this process ends with no superposing operation. Namely, the radiating sequence of the light emitting device 14 becomes the same as the sequence shown in Fig. 19A, in which the radiating sequence includes no data superposing process.

When the data superposing operation ends, the process goes to Step 304 (see Fig. 18), in which the vertical synchronizing signal may be output, and the radiation of the light emitting device 14 is controlled as to the LD driving pulse onto which the data pulse may be superposed in Step 403. Namely, since the processes from Step 303 through Step 306 are repeatedly executed for one field period, when there is data to be transmitted, the light emitting device 14

radiates pulse beams in the sequence shown in Fig. 19B, and the distance measuring operation is executed in the manner described in the previous description.

A receiving operation of a data transmitting light beam in the second embodiment, which is carried out in the computer system 46, is described in the following with reference to Fig. 21, which shows a flow chart of the operation.

When a pulse beam, which is radiated from the light emitting device 14, is detected in the receiver 47, in Step 501, the process proceeds to Step 502 in which a sensing operation of pulse beam signals S52 is started. In Step 503, the image processing is performed to the image data and/or the distance data, which are successively received in Step 502, and displayed on the monitor of the computer system 46. In Step 504, it is determined whether to terminate the receiving operation. If a key in the keyboard of the computer system 46 that is assigned to ending the process of the receiving operation is pressed, for example, the operation is terminated, and if not, the process goes back to Step 501 and stands by for the next detection.

As described above, according to the second embodiment, the same advantage as the first embodiment is obtained. Further, in the second embodiment, the distance measuring light beams and the data transmitting light beams are superposed, so that the distance information sensing

operation and the data transmitting operation are simultaneously executed, thus the efficiency of the data transmission improves.

With reference to Fig. 22, a third embodiment of the present invention is described in the following. A difference between the second and third embodiment is only in a sequence of the radiation of the light emitting device 14. So that, in the second and third embodiment, a mechanical construction and an electrical construction are the same.

Fig. 22 shows a radiating sequence of the pulse beam of light emitting device (LD) 14, with reference to the accumulating period of the signal charge in the CCD 28.

In the third embodiment, the transmitting data is superposed onto the distance measuring light beams by modulating the duration of the pulse beams S55. The modulation, a pulse-width modulation, is achieved by modulating a leading-edge of the pulse beams, in other words, by changing a timing of the rise. Namely, a pulse beam S55 is modulated such that a width of which is either T_s or $T_s + T_d$. The period T_d , the leading part of the pulse, is a period for the data, and period T_s , the trailing part of the pulse, is a period for the distance measuring light beam. The pulse beams regularly occur in the periods T_s , which are the trailing parts of the pulse beams S55, so that each of the pulse beams in the periods T_s correspond to each of the accumulating periods.

On the contrary, in the periods T_d , which are the leading parts of the pulse beam S55, an occurrence of the pulse beam is dependent on the data. Namely, when a pulse beam occurs in the period T_d , it represents "1" of a binary digit, and if not it represents "0" of the same. Therefore, a pulse beam S55 with the pulse width T_s represents "0", and a pulse beam S55 with the pulse width $T_s + T_d$ represents "1". By repeatedly radiating the pulse beams S55, the widths of which are modulated in the above manner, for one field period, the data in the camera is transmitted to the computer system 46. Note that a data superposing operation in the present embodiment is also carried out in Step 303, as mentioned in the second embodiment. Further, timing of the data period T_d is set so as not to affect the distance information sensing operation.

As described above, according to the third embodiment, the same advantage as the second embodiment is obtained.

With reference from Fig. 23 through Fig. 30, a fourth embodiment of the present invention is described. The mechanical configuration of the present embodiment is the same as those in the previous embodiments. So, the perspective view of a camera type three-dimensional image capturing device in the fourth embodiment is the same as Fig. 1. Further, the device is also utilized in the arrangement shown Fig. 3.

Fig. 23 is a block diagram showing an electrical construction of the fourth embodiment. The electrical construction of the fourth embodiment is similar to the embodiments described above except for blocks relating to the CCD driving pulse and the LD driving pulse.

An operation of the light emitting element 14a is controlled by the light emitting element control circuit 44, and the light emitting element control circuit 44 is controlled by the pulse signal output from the delay circuit 45. The pulse signal, which is output from the delay circuit 45, is a data pulse signal output from the data pulse generating circuit 29, a phase of which is delayed at the delay circuit 45. Further, the data pulse signal is a sequential pulse signal that represents the transmitting data with certain binary digits, and the data pulse generating circuit 29 is controlled by the system control circuit 35.

The light emitting element 14a radiates laser pulse beams that comprise the distance measuring light beams and the data transmitting light beams, which are superposed with each other. Thus, the receiver 47 receives and detects the laser beams, and the data in the camera is transmitted to the computer system 46. The data pulse signal, which is output from the data pulse generating circuit 29 to the delay circuit 45, is also output to the CCD driving pulse converter 51 and counter 39, simultaneously. The counter 39 counts the number

of the data pulses and outputs the number to the system control circuit 35.

In the D mode CCD driving pulse generator 23, a standard CCD driving pulse, which is a standard pulse signal for the distance measuring sensing operation, is generated and output to the CCD driving pulse converter 51. The CCD driving pulse converter 51 converts the standard CCD driving pulse to the CCD driving pulse that controls the accumulating operation of the signal charge in CCD 28, so that the accumulation is performed synchronously with the light emitting operation of the light emitting element 14a based on the data pulse. The CCD driving pulse is then output to the CCD drive circuit 30 via V/D switch 22.

In the V mode CCD driving pulse generator 41, the CCD driving pulse that performs the normal video control of the CCD 28 is generated, and the CCD driving pulse is output to the CCD drive circuit 30 via the V/D switch 22. The V/D switch 22 alternatively outputs the CCD driving pulse from the V mode CCD driving pulse generator 41 or the CCD driving pulse converter 51 to the CCD drive circuit 30 in accordance with the mode selected by the V/D mode switch 18. The V/D switch 22, the V mode CCD driving pulse generator 41 and the D mode CCD driving pulse generator 23 are controlled by the system control circuit 35.

Fig. 24 shows a timing chart of the distance information

sensing operation in the fourth embodiment. The timing in the present embodiment is slightly different from the timing shown in Fig. 8. In the present embodiment, the electric charge transfer signal S9' is output approximately simultaneously with the completion of the electric charge discharging signal S1. The rest of the timing chart is the same as that in Fig. 8. Thus the distance information is obtained in the manner described in the second embodiment.

Further, the flow chart of the distance information sensing operation in the present embodiment is also the same as that of the second embodiment shown in Fig. 18.

Fig. 25 describes the flow chart of the data superposing operation in the fourth embodiment. This operation is executed in Step 303 in Fig. 18.

In Step 601, the existence of the transmitting data is confirmed. When the transmitting data exists, the data is read out from the image memory 34 in Step 602, and the data pulse signal of the data is generated in the data pulse generating circuit 29. The data pulse signal is then output to the delay circuit 45, the counter 39 and the CCD driving pulse converter 51. In Step 603, the data pulse signal is delayed in the delay circuit 45 and output to the light emitting control circuit 44, as the LD driving pulse, which controls the light emitting element 14a. Further, at the same time, the CCD driving pulse converter 51 converts the standard CCD

driving pulse, which is generated in the D mode CCD driving pulse generator 23, to the CCD driving pulse, so that the accumulation of the electric charge in the photo-diodes 51 may be matched with the light emitting operation of the light emitting element 14a, which is controlled by the data pulse, for the distance information sensing operation. Then the superposing operation ends.

On the other hand, when it is determined in Step 601 that there is no data to be transmitted, the process proceeds to Step 604 and dummy data is generated in the system control circuit 35. The dummy data is generated for carrying out the distance information sensing operation even though the transmitting data does not exist. Namely, the dummy data is only used for instructing the timing of the distance measuring light beam radiation, and it has no specific information as transmitting data. The dummy data is output to the data pulse generating circuit 29 and a corresponding data pulse is generated. The data pulse is then output to the delay circuit 45, counter 39 and CCD driving pulse converter 51.

In Step 603, the data pulse of the dummy data is delayed in the delay circuit 45, and output to the light emitting control circuit 44 as the LD driving pulse, which controls the light emitting element 14a. Further, at the same time, the CCD driving pulse converter 51 converts the standard CCD

driving pulse, which is generated in the D mode CCD driving pulse generator 23, to the CCD driving pulse, so that the accumulation of the electric charge in the photo-diodes 51 may be matched with the light emitting operation of the light emitting element 14a, which is controlled by the data pulse of the dummy data, for the distance information sensing operation. Then the superposing operation ends.

With reference to Fig. 26 and Fig. 27, the data superposing operation of the fourth embodiment is described in the following. Fig. 26 shows the detail of the CCD driving pulse converter 51 and blocks that relate to the data superposing operation in the block diagram shown in Fig 23. Further, Fig. 27 describes the sequence of the pulse signals output from the circuits or blocks shown in Fig. 26, the accumulating period of the photo-diodes 51 and pulse beams radiated from the light emitting device (LD) 14.

A pulse pair S61 represents a partition signal that delimits a sequence of the transmitting data by predetermined binary digits of the data. Namely, the period T_d , from the first rise of a pulse pair S61 to the first rise of the next pulse pair S61, is one data period. For example, the transmitting data is 8 bits data, and the transmitting data is divided by the partition signal S61 for each set of 8 bits data. The 8 bits data pulse in each data period is output during a period T_p of the data period. The period T_p comprises

eight digit periods, and each of the digit periods corresponds to one digit of the 8 bits data. If a pulse exists in a digit period, the value of corresponding digit is "1", and if not, corresponding digit is "0".

5 A binary number indicated in each data period represents a transmitting data of 8 bits. Each digit of these 8 bits binary number corresponds to a digit period of the period T_p one-to-one. Namely, the first digit of the binary number corresponds to the rightmost digit period B1 of the period T_p , and the second digit to the second digit period from the right, the digit period B2. Each digit corresponds to each digit period, respectively, thus the eighth digit corresponds to the eighth digit period from the right or the leftmost digit period B8. For example, in the second data period from the left side of Fig. 27, the corresponding transmitting data is "00101000" of which the fourth and sixth digit are "1" and the remaining digits are "0", thus a pulse only exists in the fourth and sixth digit periods from the right. Namely, the pulse S62 corresponds to the sixth digit and the pulse S63 to the fourth digit. Further, 8 digits binary data in the third data period from the left is "11100001" of which the upper three digits are all "1", so a pulse exists in each of the corresponding three digit periods. Consequently, the three pulses, each in consecutive digit periods, compose a single continuous pulse S64.

10

15

20

25

A data pulse shown in Fig. 27 is transferred to the light emitting drive circuit 44 as a LD driving pulse through the delay circuit 45. The sequence of the pulse beam radiated from the light emitting element (LD) 14a, which corresponds to the data pulse sequence, is shown at the bottom of Fig. 27. The sequence of the pulse beam is the same as Δt delayed sequence of the data pulse delayed from the original sequence, so the light emitting element 14a radiates laser pulse beams according to the binary number in each data period.

Furthermore, since the pulse beam is used as a distance measuring light beam, the width of the digit period corresponds to the width of the distance measuring light beam, the pulse width T_s . In the present embodiment, distance information sensing operation is carried out by detecting the fall of the reflected light beam during the accumulating period in the photo-diodes 51. Therefore, each accumulating period in the photo-diodes 51 should be adjusted to each fall of the pulse beam. Namely, the CCD driving pulse converter 51 needs to convert the standard CCD driving pulse, which is generated in the D mode CCD driving pulse generator 23, to a CCD driving pulse adjusted to the fall of the pulse beam.

The standard CCD driving pulse, which is generated in the D mode CCD driving pulse generator 23, is a regular pulse, and it comprises a standard electric charge discharging pulse and a standard electric charge transfer pulse. The

standard electric charge discharging pulse is a pulse that leads an electric charge discharging operation, and the standard electric charge transfer pulse is a pulse that leads an electric charge transfer operation.

5 The CCD driving pulse converter 51 is comprised of the data synchronizing pulse generator 50 and the AND circuits 48 and 49. The data pulse signal that is input to the CCD driving pulse converter 51 is firstly converted to the data synchronizing pulse at the data synchronizing pulse generator 10 50. Then the data synchronizing pulse is output to the AND circuit 48 and 49. At the AND circuit 49, a conjunction of the data synchronizing pulse and the standard electric charge discharging pulse, which is output from the D mode CCD driving pulse generator 23 is carried out and the resultant pulse is output to the v/D switch 22 as an electric charge discharging 15 pulse (electric charge discharging signal). On the other hand, at the AND circuit 48, a conjunction of the data synchronizing pulse and the standard electric charge transfer pulse, which is output from the D mode CCD driving pulse generator 23 is carried out and the resultant pulse is also 20 output to the V/D switch 22 as an electric charge transfer pulse (electric charge transfer signal).

25 The electric charge discharging pulse and electric charge transfer pulse, which are CCD driving pulses, are output to the CCD drive circuit 30 through the D/V switch 22, and

control the electric charge discharging operation and the electric charge transfer operation at the photo-diodes 51 in CCD 28, respectively.

As described with reference to Fig. 24, the signal charge accumulating operation at the photo-diodes 51 is executed during the accumulating period T_{U1} , which corresponds to a pulse width of the pulse $S9'$, which rises approximately simultaneously with the fall of the electric charge discharging signal $S1$. Therefore, when a sequence of the data pulse is just as the sequence described in Fig. 27, the standard electric charge discharging pulse and the standard electric charge transfer pulse are converted to the electric charge discharging pulse and the electric charge transfer pulse described in Fig. 27, respectively. Consequently, the signal charge accumulations at the photo-diodes 51 are performed at the timing described in the sequence of Fig. 27, which is the second sequence from the bottom. By this, the signal charge accumulating operation at the photo-diodes 51 is adjusted to the fall of the pulse beam radiated from the light emitting device 14.

As described above, the pulse beams of the light emitting element 14a are radiated according to the data pulse signal corresponding to the transmitting data, so that the radiated pulse beam is used as a data transmitting light beam. At the same time, since the signal charge accumulating

operation is adjusted at the fall of the pulse beam, the pulse beam is used as a distance measuring light beam. Thus, the data transmitting light beam and the distance measuring light beam are superposed with each other.

5 With reference to Fig. 26 to Fig. 29, the description of the light amount supplement operation in the present embodiment is given.

As described in Fig. 27, transmitting data in each data period may be different from one another, thus the number of the falls in each data period may also be different in each data period. Moreover, since the signal charge accumulation for the distance measurement is synchronously carried out with the fall of the pulse beam, the number of signal charge accumulations depends on the transmitting data in each data period. For example, in Fig. 27, the numbers of signal charge accumulations in each data period are, four in the first data period, two in the second and one in the third, in which the ordinal is from the left. Therefore, the number of signal accumulations in a distance information sensing operation depends on the transmitting data, and as a result, the accuracy of the distance measurement is deteriorated, since the output SM_{10} , a total amount of the signal charge, depends on the transmitting data.

In the present embodiment, the light amount supplement operation is carried out and the number of the signal charge

accumulation or the integration executed in a distance information sensing operation is fixed to a predetermined number, so that the output SM_{10} is independent of the transmitting data. Fig. 28 shows the sequence of the light emitting operation executed in the distance information sensing operation, which is accompanied by the light amount supplement operation.

A distance measuring period or one field period, in which the light emitting operation for the distance information sensing operation is performed, comprises a data transmitting period and a supplement light emitting period. In the data transmitting period, the light emitting device 14 radiates pulse beams for the transmitting data signals, and in the supplement light emitting period, the above light amount supplement operation, which radiates light beams so as to compensate the number of the integrating operation or the signal charge accumulating operation, is carried out. The number of the data pulses output from the data pulse generating circuit 29 is counted in the counter 39, so the number of the accumulations or the integrations during the data transmitting period is obtained at the end of the data transmitting period. From the number of the accumulations counted in the data transmitting period, the remaining number of the accumulations for the distance information sensing operation is calculated, and the radiation of the light beams

and the corresponding accumulations are carried out in the supplement light emitting period for the remaining number of times. For example, if the predetermined number of the accumulations executed in the distance information sensing operation is six hundred thousand and the number of accumulations executed in the data transmitting period is three hundred thousand, the number of beam pulse radiations or the corresponding signal charge accumulations, which is executed in the supplement light emitting period, becomes three hundred thousand. Further, if the number of the accumulations executed in the data transmitting period is four hundred thousand, the number of beam pulse radiations or the signal charge accumulations, which is executed in the supplement light emitting period, becomes two hundred thousand. Note that there may be provided a switching period, during which the operation switches, between the data transmitting period and the supplement light emitting period.

With reference to Fig. 29, the sequence of the pulse beam emission and the signal charge accumulation in the supplement light emitting period is explained in the following. Fig. 29 shows the sequence of the light amount supplement operation performed in the supplement light emitting period.

In the system control circuit 35, the remaining number of the pulse beam radiations or the signal charge accumulations in the supplement light emitting period, which are required

for executing the predetermined number of integrations, is calculated and the dummy data is generated for the light amount supplement operation. The generated dummy pulse is output through the data pulse generating circuit 29 as a data pulse.

5 The sequence of the data pulses is partitioned with the partition signals S61 for each 8 bits, as well as the sequence of the data pulses representing the transmitting data, which is described with reference to Fig. 27. Further, the width of the digit period and etc. are similar to those in Fig. 27. The conversions, which are performed to the data pulse of the transmitting data at the delay circuit 45 and the CCD driving pulse converter 51, are also performed to the data pulse of the dummy data, and converted pulses are output to the light emitting control circuit 44 and the CCD drive circuit 30 as an LD driving pulse and a CCD driving pulse, respectively.

10 Namely, when the sequence of the data pulse for the dummy data is as described in Fig. 29, the sequences of the electric charge discharging pulse and the electric charge transfer pulse are reduced to the sequences shown in Fig. 29.

15 Consequently, the sequence of the electric charge accumulating operation in the photo-diodes also becomes as is shown in Fig. 29. Further, a timing for radiating the beam pulse is delayed Δt from that of the data pulse of the dummy data.

25 Each of the digit periods is adjacent to one another,

therefore, if pulses consecutively exist over a certain successive digit periods, they compose a single consecutive pulse. For example, the above case is shown in Fig. 27 as the pulse corresponding to the upper three digits of the third data period, the single pulse S64 of which a pulse width is $3 \cdot T_s$. Further, as described above, in order to sense the distance information, the distance information sensing operation needs to detect the fall of the pulse beam during the signal charge accumulating period. So, when the digit of data pulse is 8 bits, the maximum number of the signal charge accumulation for one supplement period is four, which is obtained when data pulses exist in alternate digit periods of a supplement period. The sequence of data pulse in Fig. 29 illustrates the case when the accumulations are required ten times in the supplement light emitting period. In the first and second supplement periods, the pulse beams are emitted alternately four times, the maximum number of times, and corresponding signal charges of reflected pulse beams are accumulated respectively. In the third supplement period, the remaining two times emission and accumulation is carried out.

Note that, the receiving operation of the optical transmission system executed in the computer system 46 of the fourth embodiment is the same as the operation described in the second and third embodiment, the operation of which

is described with reference to Fig. 21.

As described above, the same advantages as the second and third embodiments are obtained by the fourth embodiment.

Although the embodiments of the present invention have
5 been described herein with reference to the accompanying drawings, obviously many modifications and changes may be made by those skilled in this art without departing from the scope of the invention.

The present disclosure relates to subject matter
10 contained in Japanese Patent Application Nos. 11-216449, 11-216987 and 11-217061 (all filed on July 30, 1999) which are expressly incorporated herein, by reference, in their entireties.

CLAIMS

1. A three-dimensional image capturing device, comprising:

a first light source that radiates a light beam ;

an image device that accumulates signal charge corresponding to a quantity of light received on said image device;

a distance information sensing processor that radiates a distance measuring light beam from said first light source to a measurement subject and detects distance information which relates to said measurement subject by receiving a reflected light beam from said measurement subject due to said distance measuring light beam on said image device; and

a data transmitting processor that controls radiation at a second light source and radiates transmitting light beams, so that data is transmitted to an external device through space.

2. A device according to claim 1, wherein said second light source is identical to said first light source.

3. A device according to claim 1, wherein pulse frequency-modulation bands of said distance measuring light beam and said transmitting light beam are different from each other.

4. A device according to claim 1, wherein said data

comprises said distance information.

5. A device according to claim 1, comprising an image sensing processor that detects image information of said measurement subject by forming an image of said measurement subject on said image device.

6. A device according to claim 5, wherein said data comprises said image information.

7. A device according to claim 1, comprising a switching processor that switches on and off the drive of said data transmitting processor.

8. A device according to claim 2, wherein a series of said distance measuring light beams and a series of said transmitting light beams are superposed.

9. A device according to claim 8, wherein said distance information sensing processor radiates said distance measuring light beams from said first light source a predetermined number of times, so that signal charge is accumulated in said image device due to each reiterated radiation.

10. A device according to claim 9, wherein timing for radiating said transmitting light beams is based upon the timing of said reiterated radiation of said distance measuring light beams.

11. A device according to claim 10, wherein said series of said distance measuring light beams and said series of

said transmitting light beams are superposed, so that said transmitting light beams are radiated in the intervals between said distance measuring light beams.

12. A device according to claim 11, wherein said transmitting light beams comprise a pulse beam representing binary data in predetermined digits.

13. A device according to claim 10, wherein said distance measuring light beams and said transmitting light beams are superposed by pulse-width modulation of said light beams, so that said light beams comprise two types of pulse beams having different widths, which represent binary data of said data and are used for detecting said distance information, concurrently.

14. A device according to claim 9, wherein said distance measuring light beam is radiated before an accumulation of signal charge in said image device starts, and signal charge corresponding to said distance information of said measurement subject is accumulated during a period from a beginning of said accumulation to an end of said reflected light beam reception at said image device.

15. A device according to claim 14, wherein said transmitting light beam is radiated prior to said distance measuring light beam.

16. A device according to claim 15, wherein said transmitting light beam is radiated during a period, from

an end of said accumulation of said signal charge in said image device to a beginning of said distance measuring light beam radiation.

17. A device according to claim 8, wherein said distance measuring light beams comprise a synchronizing signal of an optical transmission system.

18. A device according to claim 2, wherein an accumulation of said signal charge in said image device is synchronously carried out with said transmitting light beam, so that said transmitting light beam can be used as said distance measuring light beam as well, and by this, said transmitting light beams and said distance measuring light beams are superposed with each other.

19. A device according to claim 18, wherein said distance information sensing processor radiates said distance measuring light beams from said first light source a predetermined number of times, so that signal charge is accumulated at said image device due to each reiterated radiation.

20. A device according to claim 18, wherein a series of said transmitting light beams represents binary data.

21. A device according to claim 18, wherein said transmitting light beams comprise pulse modulated laser beams.

22. A device according to claim 21, wherein a data sequence

transmitted by said transmitting light beams comprises a partition signal that delimits said data sequence by predetermined binary digits of the data.

23. A device according to claim 18, wherein said image device comprises a plurality of photoelectric conversion elements that accumulates signal charge corresponding to a quantity of light received, and signal charge holding units disposed adjacent to each of said photoelectric conversion elements.

24. A device according to claim 23, wherein the accumulation of said signal charge in said image device begins with a fall of an electric charge discharging signal that discharges the charge accumulated in said photoelectric conversion elements, and ends with a fall of an electric charge transfer signal that transfers said signal charge accumulated in said photoelectric conversion elements to said signal charge holding units.

25. A device according to claim 24, wherein said electric charge transfer signal rises approximately simultaneously with the fall of said electric charge discharging signal.

26. A device according to claim 25, wherein said electric charge transfer signal is generated by conjunction of a standard electric charge transfer signal comprised of periodic pulse signals and a data synchronizing pulse signal generated synchronously with the fall of a pulse signal of

said data sequence;

said electric charge discharging signal is generated by conjunction of said data synchronizing pulse signal and a standard electric charge discharging signal a period of which is the same as said standard electric charge transfer signal and from which the phase is delayed by a half period; and

said data synchronizing pulse signal is synchronized with said standard electric charge discharging signal and the pulse width of said data synchronizing pulse signal is the same as one period of said standard electric charge transfer signal.

27. A device according to claim 18, wherein the accumulation of said signal charge starts when said transmitting light beam falls.

28. A device according to claim 19, wherein said distance information sensing processor and said data transmitting processor are actuated during a distance measuring period, in which said distance measuring light beams are repeatedly radiated said predetermined number of times, said distance measuring period comprising:

a data transmitting period, in which said distance measuring light beams and said transmitting light beams are superposed and radiated; and

a supplement light emitting period, in which distance

measuring light beams are radiated so as to supplement the number of said distance measuring light beams radiated in said data transmitting period, by the number deficient from said predetermined number of times.

5 29. A receiver for use in an optical transmission system, a transmitter of which comprises a three-dimensional image capturing device, comprising:

a first light source that radiates a light beam;

an image device that accumulates signal charge that corresponds to a quantity of light received on said image device;

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000
1005
1010
1015
1020
1025
1030
1035
1040
1045
1050
1055
1060
1065
1070
1075
1080
1085
1090
1095
1100
1105
1110
1115
1120
1125
1130
1135
1140
1145
1150
1155
1160
1165
1170
1175
1180
1185
1190
1195
1200
1205
1210
1215
1220
1225
1230
1235
1240
1245
1250
1255
1260
1265
1270
1275
1280
1285
1290
1295
1300
1305
1310
1315
1320
1325
1330
1335
1340
1345
1350
1355
1360
1365
1370
1375
1380
1385
1390
1395
1400
1405
1410
1415
1420
1425
1430
1435
1440
1445
1450
1455
1460
1465
1470
1475
1480
1485
1490
1495
1500
1505
1510
1515
1520
1525
1530
1535
1540
1545
1550
1555
1560
1565
1570
1575
1580
1585
1590
1595
1600
1605
1610
1615
1620
1625
1630
1635
1640
1645
1650
1655
1660
1665
1670
1675
1680
1685
1690
1695
1700
1705
1710
1715
1720
1725
1730
1735
1740
1745
1750
1755
1760
1765
1770
1775
1780
1785
1790
1795
1800
1805
1810
1815
1820
1825
1830
1835
1840
1845
1850
1855
1860
1865
1870
1875
1880
1885
1890
1895
1900
1905
1910
1915
1920
1925
1930
1935
1940
1945
1950
1955
1960
1965
1970
1975
1980
1985
1990
1995
2000
2005
2010
2015
2020
2025
2030
2035
2040
2045
2050
2055
2060
2065
2070
2075
2080
2085
2090
2095
2100
2105
2110
2115
2120
2125
2130
2135
2140
2145
2150
2155
2160
2165
2170
2175
2180
2185
2190
2195
2200
2205
2210
2215
2220
2225
2230
2235
2240
2245
2250
2255
2260
2265
2270
2275
2280
2285
2290
2295
2300
2305
2310
2315
2320
2325
2330
2335
2340
2345
2350
2355
2360
2365
2370
2375
2380
2385
2390
2395
2400
2405
2410
2415
2420
2425
2430
2435
2440
2445
2450
2455
2460
2465
2470
2475
2480
2485
2490
2495
2500
2505
2510
2515
2520
2525
2530
2535
2540
2545
2550
2555
2560
2565
2570
2575
2580
2585
2590
2595
2600
2605
2610
2615
2620
2625
2630
2635
2640
2645
2650
2655
2660
2665
2670
2675
2680
2685
2690
2695
2700
2705
2710
2715
2720
2725
2730
2735
2740
2745
2750
2755
2760
2765
2770
2775
2780
2785
2790
2795
2800
2805
2810
2815
2820
2825
2830
2835
2840
2845
2850
2855
2860
2865
2870
2875
2880
2885
2890
2895
2900
2905
2910
2915
2920
2925
2930
2935
2940
2945
2950
2955
2960
2965
2970
2975
2980
2985
2990
2995
3000
3005
3010
3015
3020
3025
3030
3035
3040
3045
3050
3055
3060
3065
3070
3075
3080
3085
3090
3095
3100
3105
3110
3115
3120
3125
3130
3135
3140
3145
3150
3155
3160
3165
3170
3175
3180
3185
3190
3195
3200
3205
3210
3215
3220
3225
3230
3235
3240
3245
3250
3255
3260
3265
3270
3275
3280
3285
3290
3295
3300
3305
3310
3315
3320
3325
3330
3335
3340
3345
3350
3355
3360
3365
3370
3375
3380
3385
3390
3395
3400
3405
3410
3415
3420
3425
3430
3435
3440
3445
3450
3455
3460
3465
3470
3475
3480
3485
3490
3495
3500
3505
3510
3515
3520
3525
3530
3535
3540
3545
3550
3555
3560
3565
3570
3575
3580
3585
3590
3595
3600
3605
3610
3615
3620
3625
3630
3635
3640
3645
3650
3655
3660
3665
3670
3675
3680
3685
3690
3695
3700
3705
3710
3715
3720
3725
3730
3735
3740
3745
3750
3755
3760
3765
3770
3775
3780
3785
3790
3795
3800
3805
3810
3815
3820
3825
3830
3835
3840
3845
3850
3855
3860
3865
3870
3875
3880
3885
3890
3895
3900
3905
3910
3915
3920
3925
3930
3935
3940
3945
3950
3955
3960
3965
3970
3975
3980
3985
3990
3995
4000
4005
4010
4015
4020
4025
4030
4035
4040
4045
4050
4055
4060
4065
4070
4075
4080
4085
4090
4095
4100
4105
4110
4115
4120
4125
4130
4135
4140
4145
4150
4155
4160
4165
4170
4175
4180
4185
4190
4195
4200
4205
4210
4215
4220
4225
4230
4235
4240
4245
4250
4255
4260
4265
4270
4275
4280
4285
4290
4295
4300
4305
4310
4315
4320
4325
4330
4335
4340
4345
4350
4355
4360
4365
4370
4375
4380
4385
4390
4395
4400
4405
4410
4415
4420
4425
4430
4435
4440
4445
4450
4455
4460
4465
4470
4475
4480
4485
4490
4495
4500
4505
4510
4515
4520
4525
4530
4535
4540
4545
4550
4555
4560
4565
4570
4575
4580
4585
4590
4595
4600
4605
4610
4615
4620
4625
4630
4635
4640
4645
4650
4655
4660
4665
4670
4675
4680
4685
4690
4695
4700
4705
4710
4715
4720
4725
4730
4735
4740
4745
4750
4755
4760
4765
4770
4775
4780
4785
4790
4795
4800
4805
4810
4815
4820
4825
4830
4835
4840
4845
4850
4855
4860
4865
4870
4875
4880
4885
4890
4895
4900
4905
4910
4915
4920
4925
4930
4935
4940
4945
4950
4955
4960
4965
4970
4975
4980
4985
4990
4995
5000
5005
5010
5015
5020
5025
5030
5035
5040
5045
5050
5055
5060
5065
5070
5075
5080
5085
5090
5095
5100
5105
5110
5115
5120
5125
5130
5135
5140
5145
5150
5155
5160
5165
5170
5175
5180
5185
5190
5195
5200
5205
5210
5215
5220
5225
5230
5235
5240
5245
5250
5255
5260
5265
5270
5275
5280
5285
5290
5295
5300
5305
5310
5315
5320
5325
5330
5335
5340
5345
5350
5355
5360
5365
5370
5375
5380
5385
5390
5395
5400
5405
5410
5415
5420
5425
5430
5435
5440
5445
5450
5455
5460
5465
5470
5475
5480
5485
5490
5495
5500
5505
5510
5515
5520
5525
5530
5535
5540
5545
5550
5555
5560
5565
5570
5575
5580
5585
5590
5595
5600
5605
5610
5615
5620
5625
5630
5635
5640
5645
5650
5655
5660
5665
5670
5675
5680
5685
5690
5695
5700
5705
5710
5715
5720
5725
5730
5735
5740
5745
5750
5755
5760
5765
5770
5775
5780
5785
5790
5795
5800
5805
5810
5815
5820
5825
5830
5835
5840
5845
5850
5855
5860
5865
5870
5875
5880
5885
5890
5895
5900
5905
5910
5915
5920
5925
5930
5935
5940
5945
5950
5955
5960
5965
5970
5975
5980
5985
5990
5995
6000
6005
6010
6015
6020
6025
6030
6035
6040
6045
6050
6055
6060
6065
6070
6075
6080
6085
6090
6095
6100
6105
6110
6115
6120
6125
6130
6135
6140
6145
6150
6155
6160
6165
6170
6175
6180
6185
6190
6195
6200
6205
6210
6215
6220
6225
6230
6235
6240
6245
6250
6255
6260
6265
6270
6275
6280
6285
6290
6295
6300
6305
6310
6315
6320
6325
6330
6335
6340
6345
6350
6355
6360
6365
6370
6375
6380
6385
6390
6395
6400
6405
6410
6415
6420
6425
6430
6435
6440
6445
6450
6455
6460
6465
6470
6475
6480
6485
6490
6495
6500
6505
6510
6515
6520
6525
6530
6535
6540
6545
6550
6555
6560
6565
6570
6575
6580
6585
6590
6595
6600
6605
6610
6615
6620
6625
6630
6635
6640
6645
6650
6655
6660
6665
6670
6675
6680
6685
6690
6695
6700
6705
6710
6715
6720
6725
6730
6735
6740
6745
6750
6755
6760
6765
6770
6775
6780
6785
6790
6795
6800
6805
6810
6815
6820
6825
6830
6835
6840
6845
6850
6855
6860
6865
6870
6875
6880
6885
6890
6895
6900
6905
6910
6915
6920
6925
6930
6935
6940
6945
6950
6955
6960
6965
6970
6975
6980
6985
6990
6995
7000
7005
7010
7015
7020
7025
7030
7035
7040
7045
7050
7055
7060
7065
7070
7075
7080
7085
7090
7095
7100
7105
7110
7115
7120
7125
7130
7135
7140
7145
7150
7155
7160
7165
7170
7175
7180
7185
7190
7195
7200
7205
7210
7215
7220
7225
7230
7235
7240
7245
7250
7255
7260
7265
7270
7275
7280
7285
7290
7295
7300
7305
7310
7315
7320
7325
7330
7335
7340
7345
7350
7355
7360
7365
7370
7375
7380
7385
7390
7395
7400
7405
7410
7415
7420
7425
7430
7435
7440
7445
7450
7455
7460
7465
7470
7475
7480
7485
7490
7495
7500
7505
7510
7515
7520
7525
7530
7535
7540
7545
7550
7555
7560
7565
7570
7575
7580
7585
7590
7595
7600
7605
7610
7615
7620
7625
7630
7635
7640
7645
7650
7655
7660
7665
7670
7675
7680
7685
7690
7695
7700
7705
7710
7715
7720
7725
7730
7735
7740
7745
7750
7755
7760
7765
7770
7775
7780
7785
7790
7795
7800
7805
7810
7815
7820
7825
7830
7835
7840
7845
7850
7855
7860
7865
7870
7875
7880
7885
7890
7895
7900
7905
7910
7915
7920
7925
7930
7935
7940
7945
7950
7955
7960
7965
7970
7975
7980
7985
7990
7995
8000
8005
8010
8015
8020
8025
8030
8035
8040
8045
8050
8055
8060
8065
8070
8075
8080
8085
8090
8095
8100
8105
8110
8115
8120
8125
8130
8135
8140
8145
8150
8155
8160
8165
8170
8175
8180
8185
8190
8195
8200
8205
8210
8215
8220
8225
8230
8235
8240
8245
8250
8255
8260
8265
8270
8275
8280
8285
8290
8295
8300
8305
8310
8315
8320
8325
8330
8335
8340
8345
8350
8355
8360
8365
8370
8375
8380
8385
8390
8395
8400
8405
8410
8415
8420
8425
8430
8435
8440
8445
8450
8455
8460
8465
8470
8475
8480
8485
8490
8495
8500
8505
8510
8515
8520
8525
8530
8535
8540
8545
8550
8555
8560
8565
8570
8575
8580
8585
8590
8595
8600
8605
8610
8615
8620
8625
8630
8635
8640
8645
8650
8655
8660
8665
8670
8675
8680
8685
8690
8695
8700
8705
8710
8715
8720
8725
8730
8735
8740
8745
8750
8755
8760
8765
8770
8775
8780
8785
8790
8795
8800
8805
8810
8815
8820
8825
8830
8835
8840
8845
8850
8855
8860
8865
8870
8875
8880
8885
8890
8895
8900
8905
8910
8915
8920
8925
8930
8935
8940
8945
8950
8955
8960
8965
8970
8975
8980
8985
8990
8995
9000
9005
9010
9015
9020
9025
9030
9035
9040
9045
9050
9055
9060
9065
9070
9075
9080
9085
9090
9095
9100
9105
9110
9115
9120
9125
9130
9135
9140
9145
9150
9155
9160
9165
9170
9175
9180
9185
9190
9195
9200
9205
9210
9215
9220
9225
9230
9235
9240
9245
9250
9255
9260
9265
9270
9275
9280
9285
9290
9295
9300
9305
9310
9315
9320
9325
9330
9335
9340
9345
9350
9355
9360
9365
9370
9375
9380
9385
9390
9395
9400
9405
9410
9415
9420
9425
9430
9435
9440
9445
9450
9455
9460
9465
9470
9475
9480
9485
9490
9495
9500
9505
9510
9515
9520
9525
9530
9535
9540
9545
9550
9555
9560
9565
9570
9575
9580
9585
9590
9595
9600
9605
9610
9615
9620
9625
9630
9635
9640
9645
9650
9655
9660
9665
9670
9675
9680
9685
9690
9695
9700
9705
9710
9715
9720
9725
9730
9735
9740
9745
9750
9755
9760
9765
9770
9775
9780
9785
9790
9795
9800
9805
9810
9815
9820
9825
9830
9835
9840
9845
9850
9855
9860
9865
9870
9875
9880
9885
9890
9895
9900
9905
9910
9915
9920
9925
9930
9935
9940
9945
9950
9955
9960
9965
9970
9975
9980
9985
9990
9995
10000
10005
10010
10015
10020
10025
10030
10035
10040
10045
10050
10055
10060
10065
10070
10075
10080
10085
10090
10095
10100
10105
10110
10115
10120
10125
10130
10135
10140
10145
10150
10155
10160
10165
10170
10175
10180
10185
10190
10195
10200
10205
10210
10215
10220
10225
10230
10235
10240
10245
10250
10

30. A receiver according to claim 29, wherein said second light source is identical to said first light source.

10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044

5

15

P19372.A02

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Shunichi KAKIUCHI et al.
Appl. No. : Not Yet Assigned
Filed : Concurrently Herewith
For : THREE-DIMENSIONAL IMAGE CAPTURING DEVICE

REQUEST FOR APPROVAL OF PROPOSED DRAWING CHANGES

Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Attached hereto are proposed drawing corrections to Figure 27, with the proposed corrections to the drawings being indicated in red ink therein.

Figure 27 has been changed to replace "S22", "S23" and "S24" with ---S62---, ---S63--- and ---S64--- respectively in order to be consistent with the specification on page 51, lines 19, 20 and 25.


The changes indicated above have been made to enable the drawings to more accurately correspond to the description relating to the figure in Applicants' disclosure.

Applicants submit that, by these amendments, no prohibited new matter has been added to the application, and respectfully requests the Examiner to indicate approval for entry of the proposed drawing changes in the next official communication.

P19372.A02

Should the Examiner have any questions or comments regarding the above proposed drawing corrections, the Examiner is invited to contact the undersigned at the below-listed telephone number.

Respectfully submitted,
Shunichi KAKIUCHI et al.


Bruce H. Bernstein
Reg. No. 29,027

July 28, 2000
GREENBLUM & BERNSTEIN, P.L.C.
1941 Roland Clarke Place
Reston, Virginia 20191
(703) 716-1191

FIG. 27

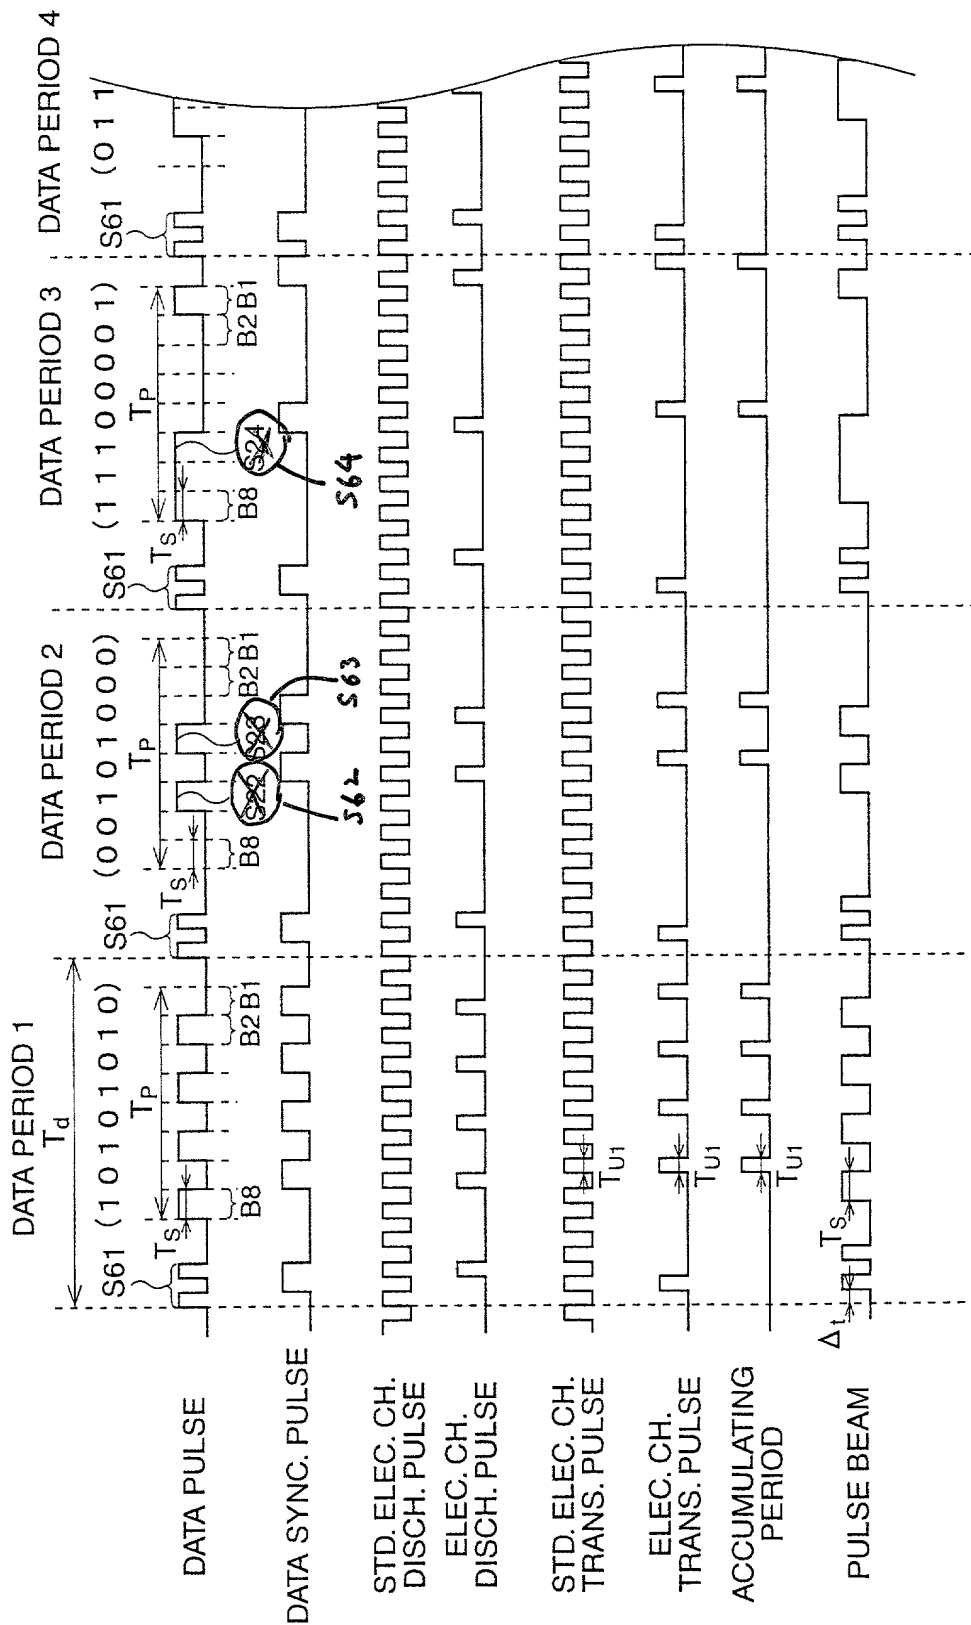


FIG. 1

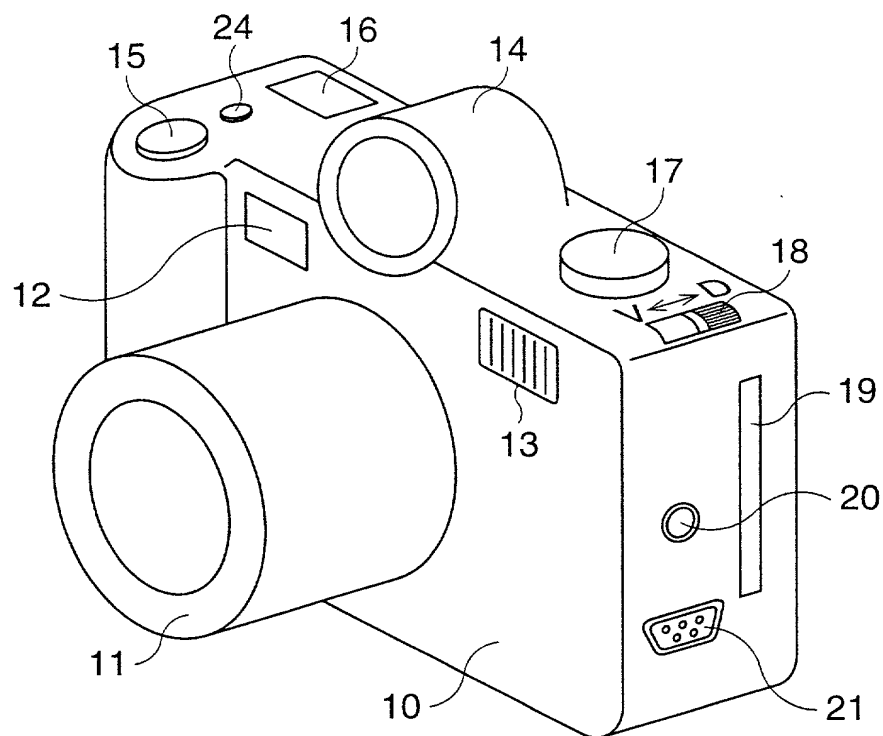


FIG. 2

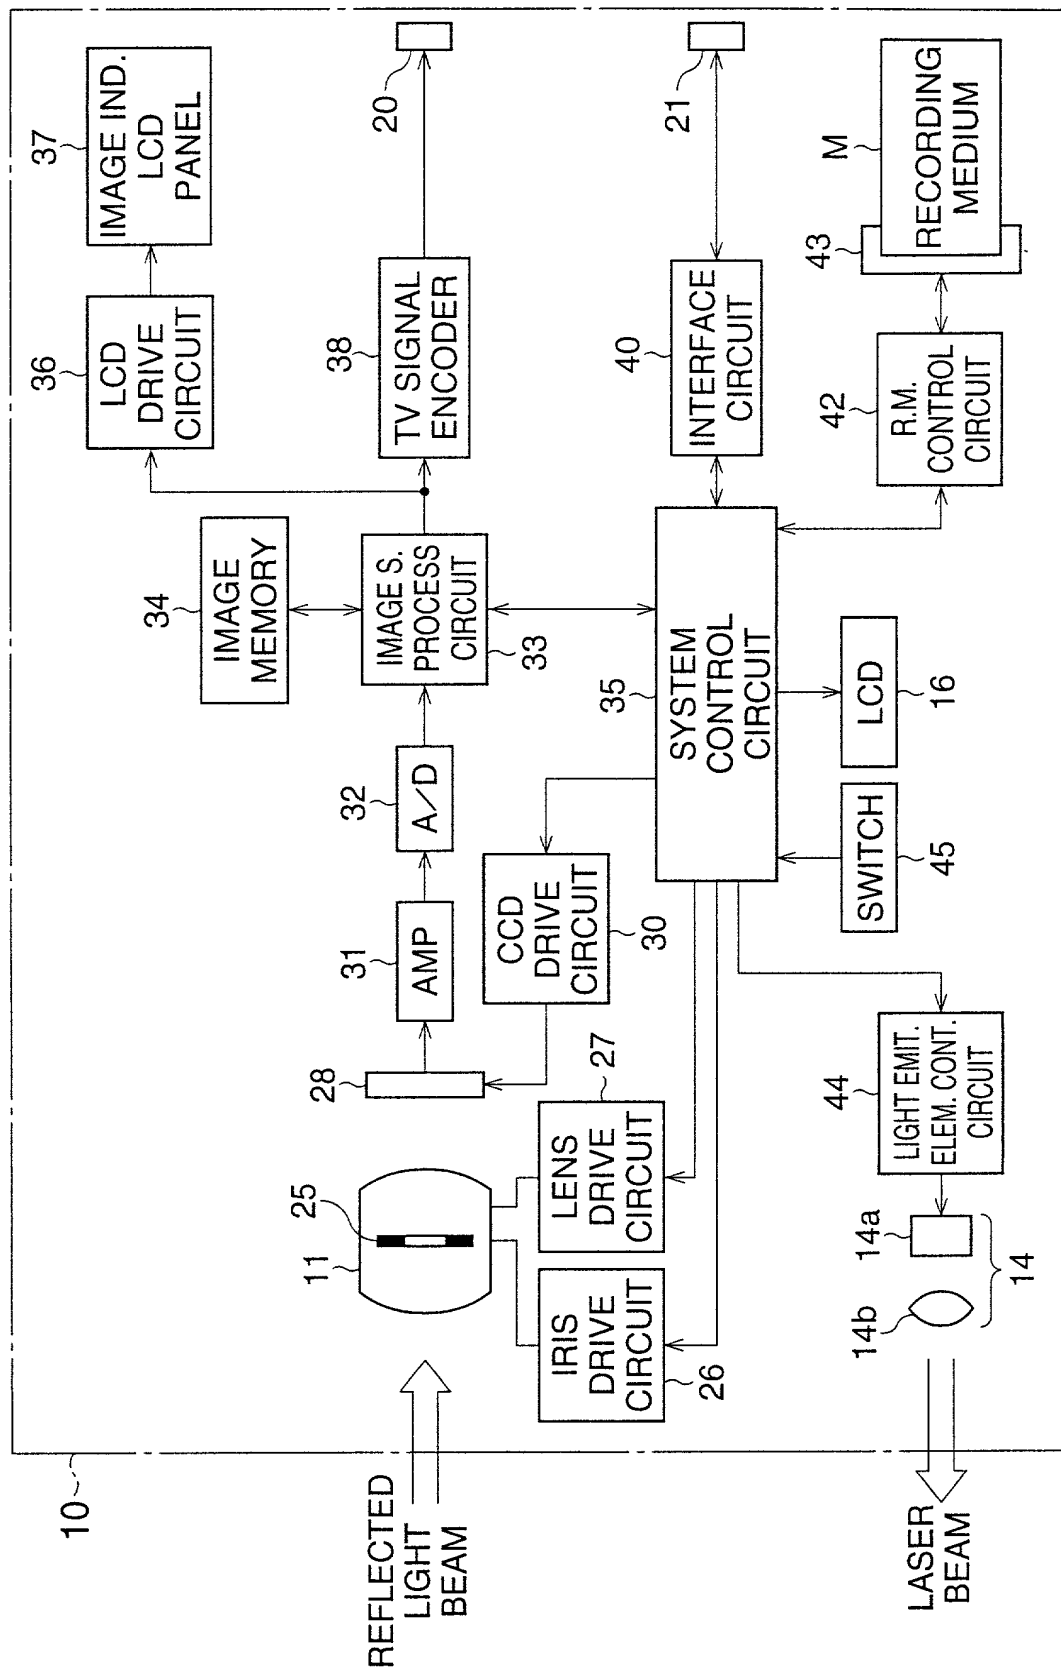


FIG. 3

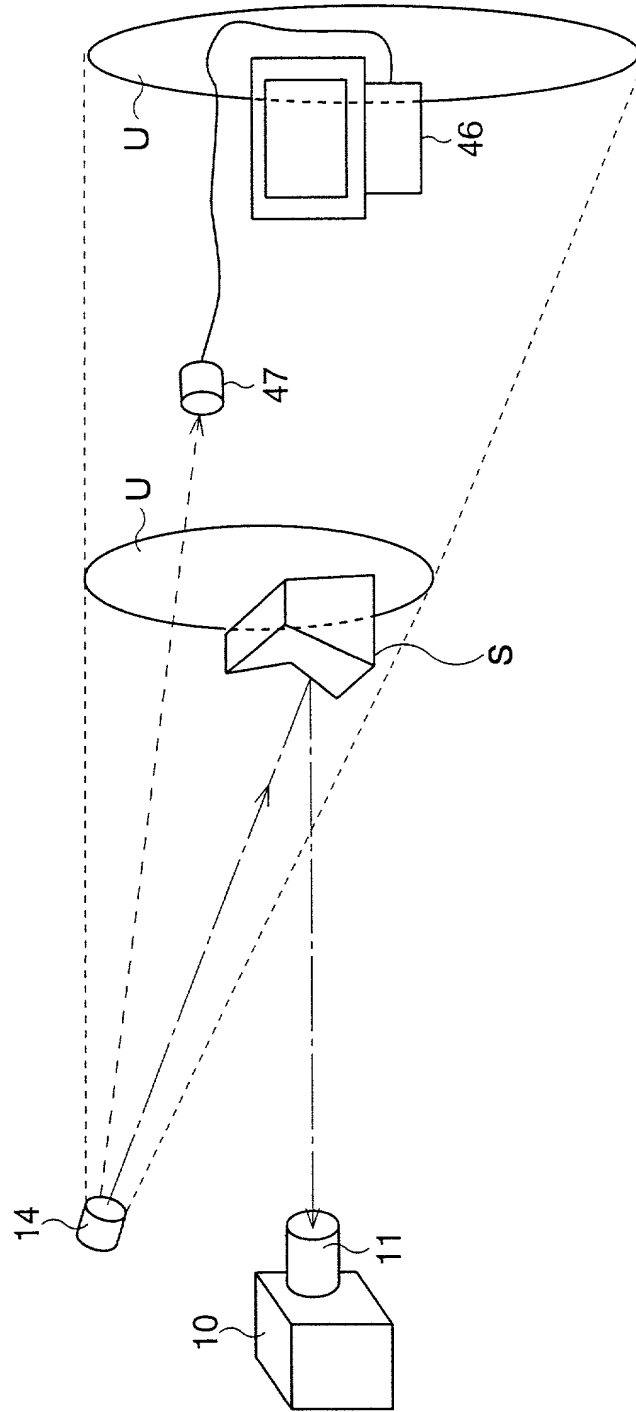


FIG. 4

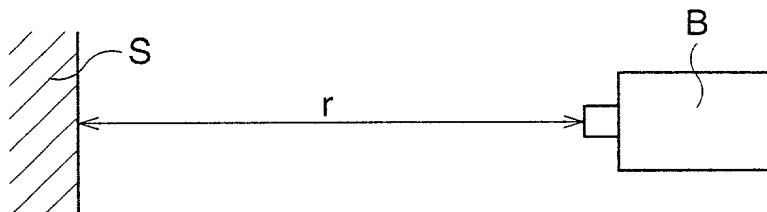


FIG. 5

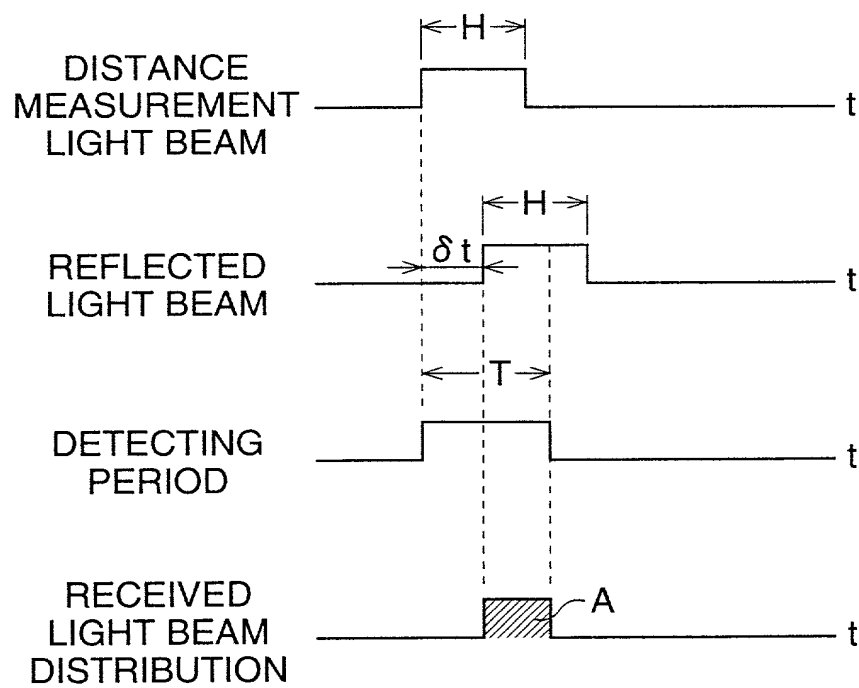


FIG. 6

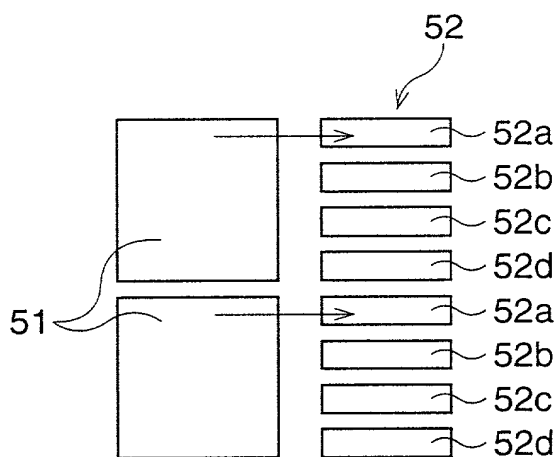


FIG. 7

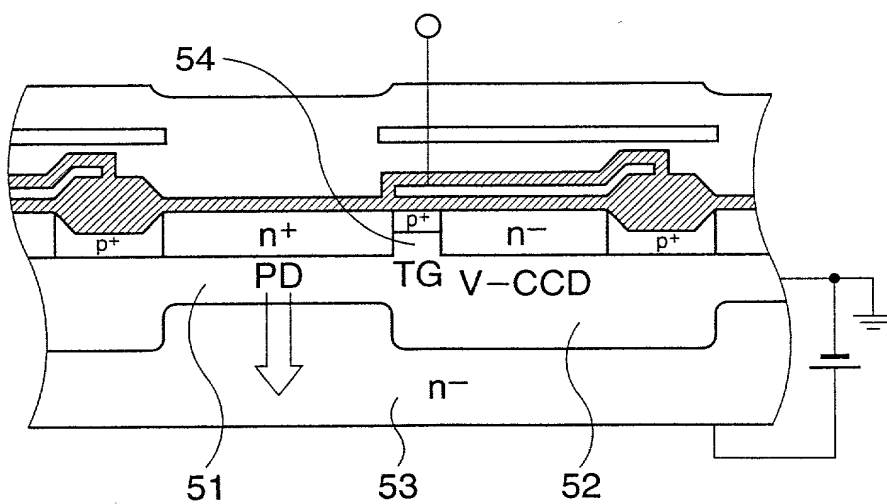


FIG. 8

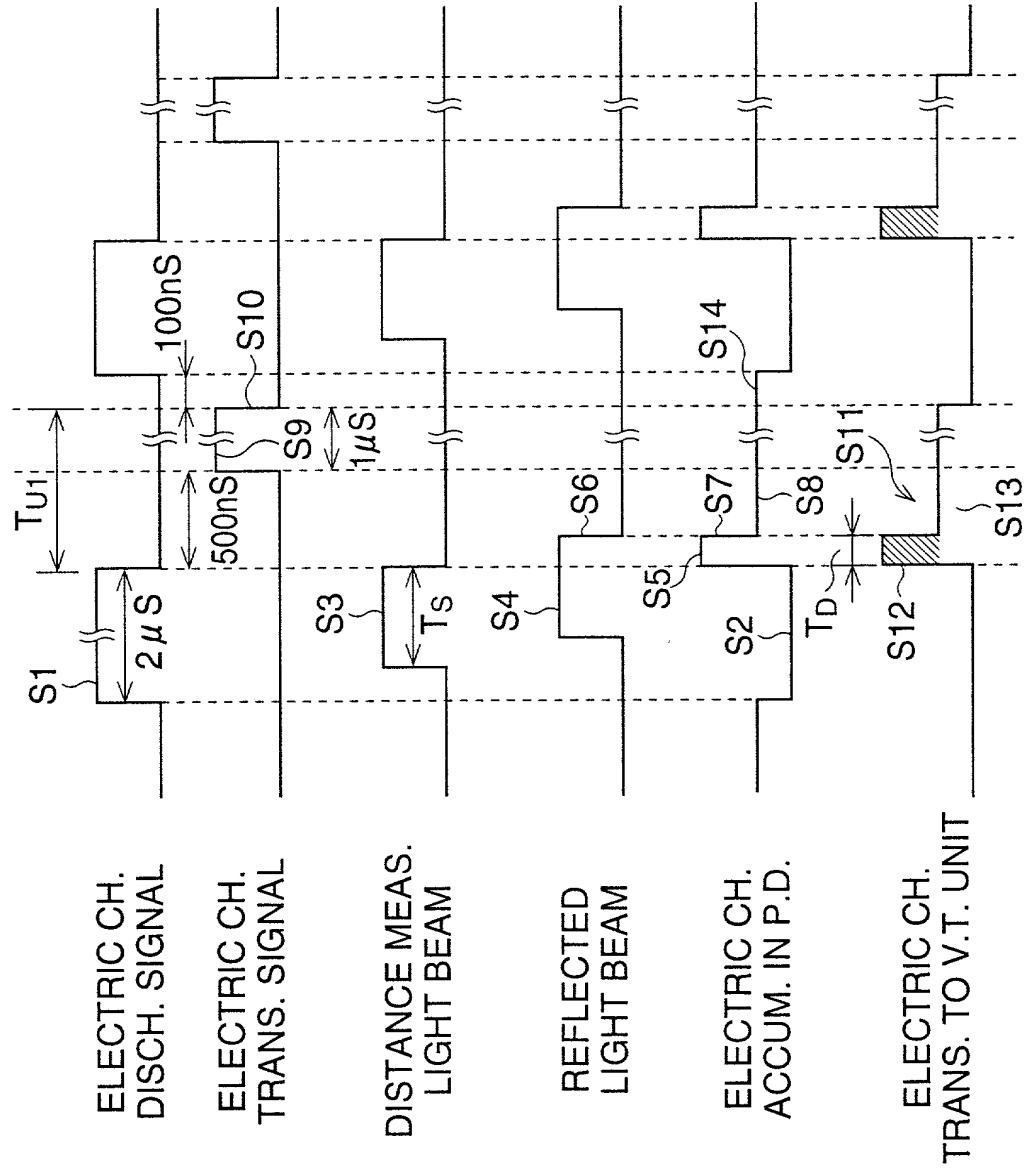


FIG. 9

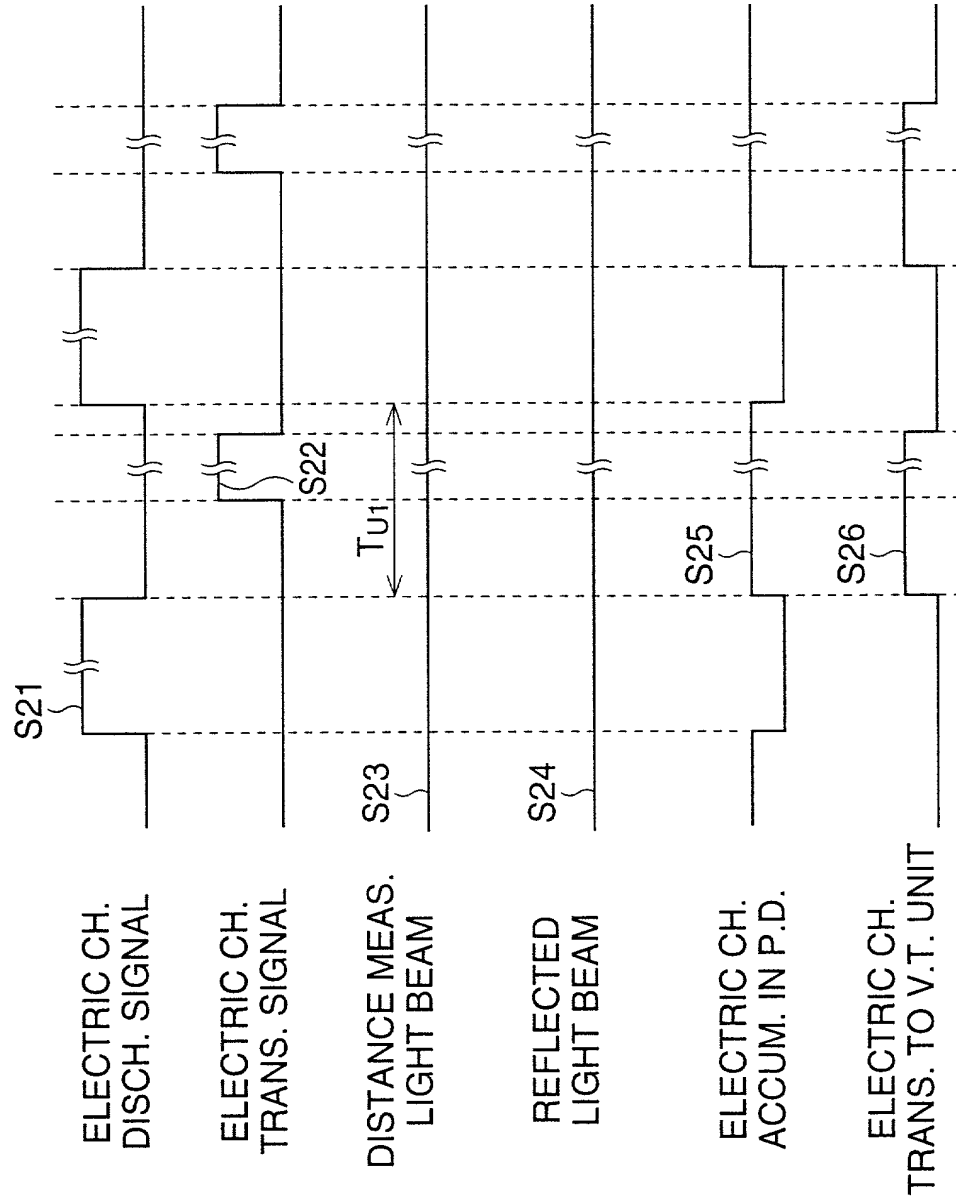


FIG. 10

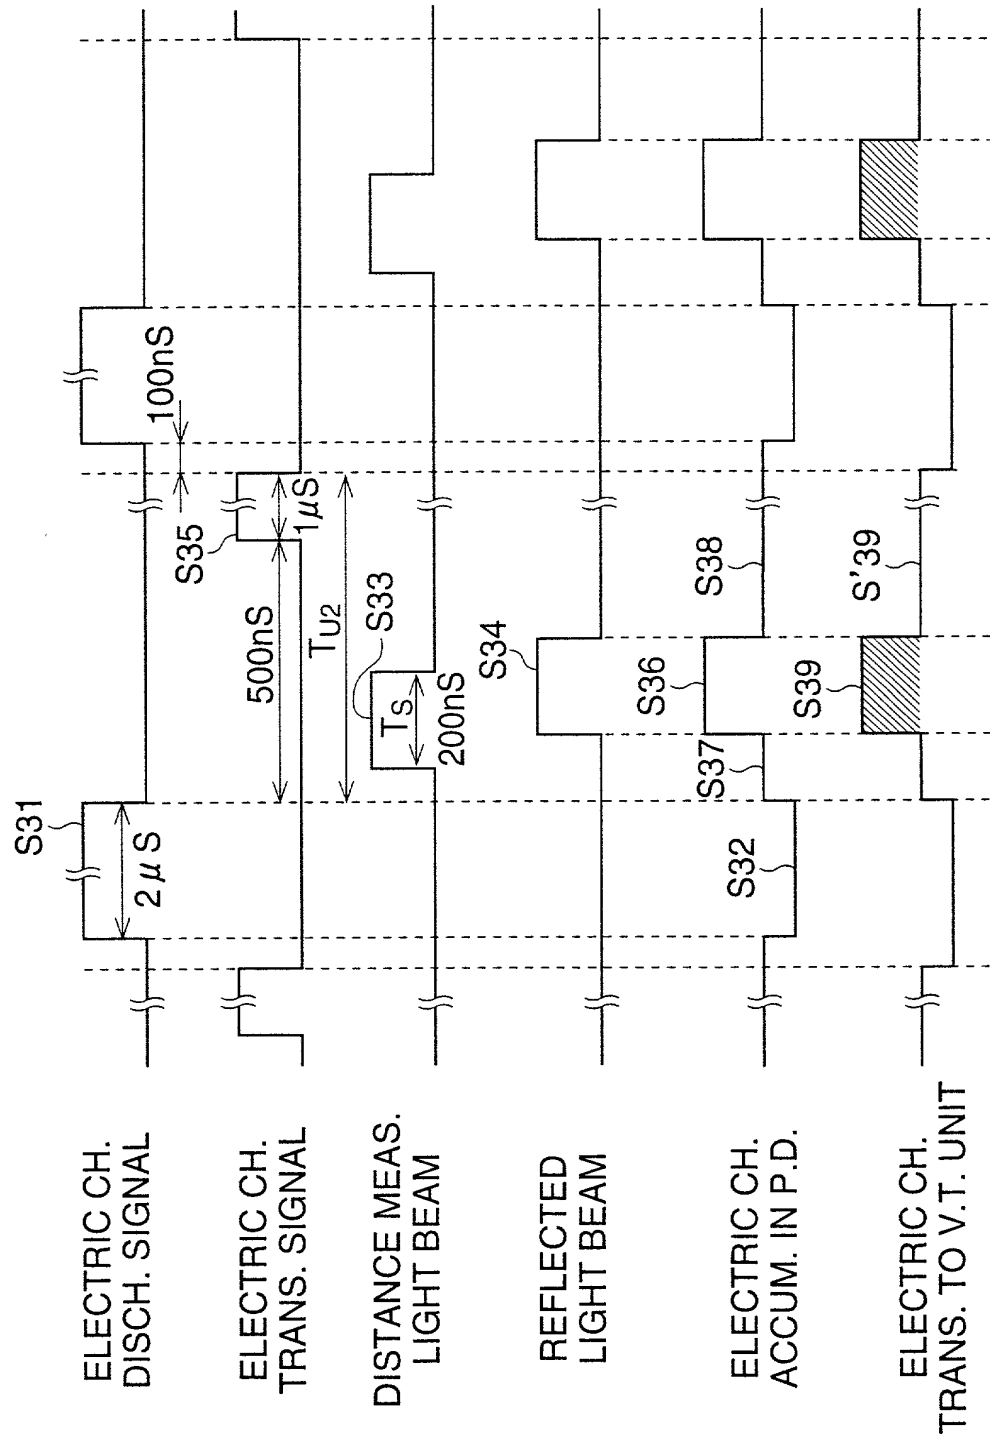


FIG. 11

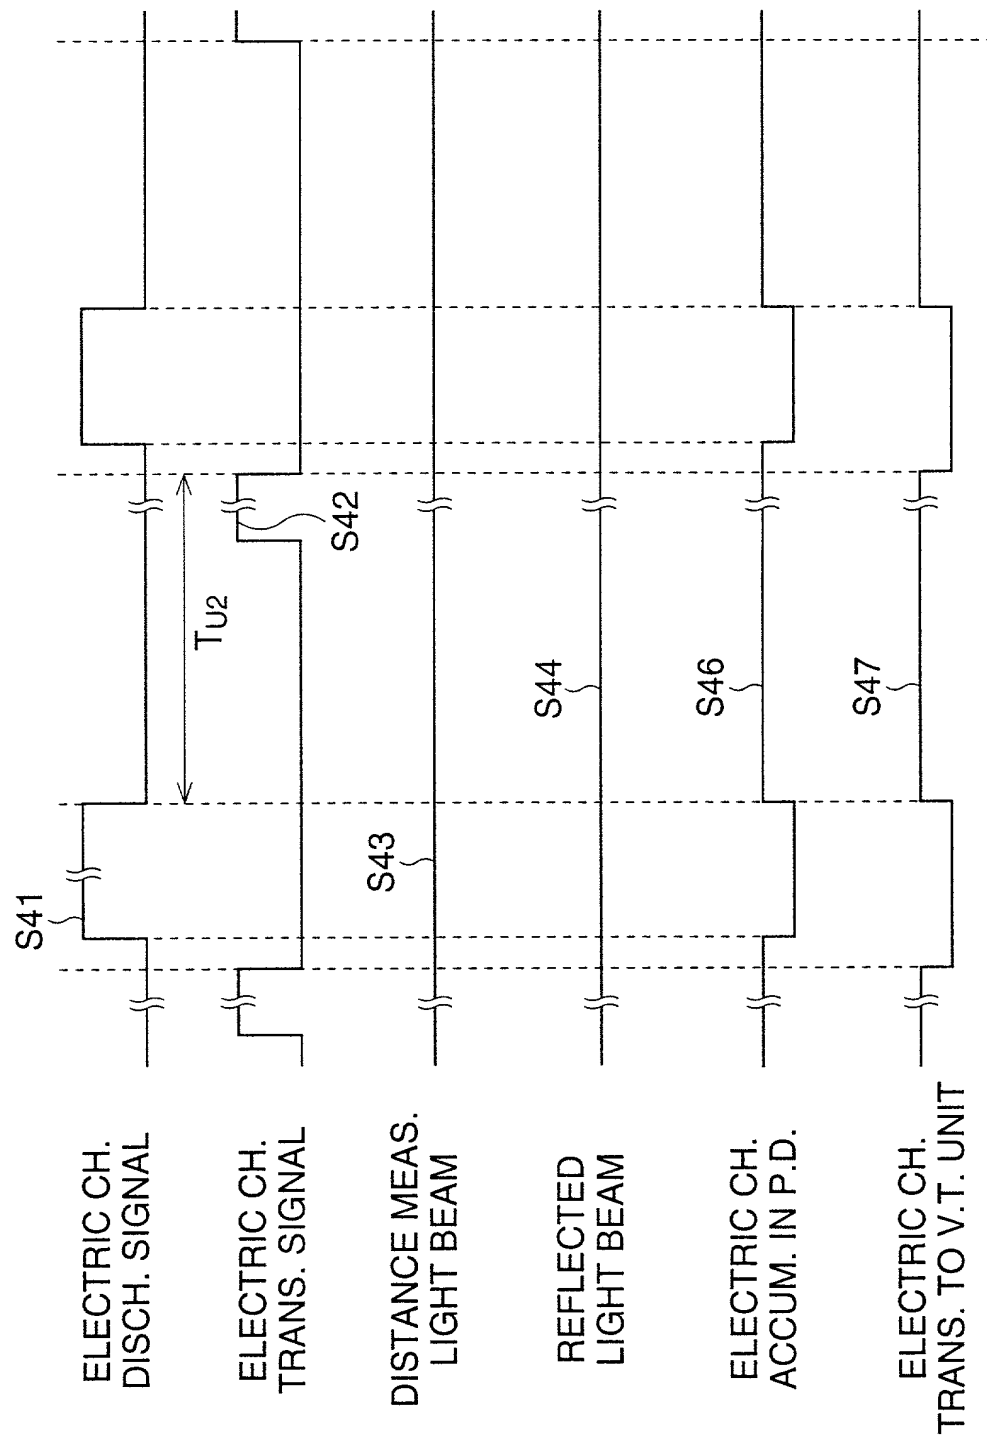
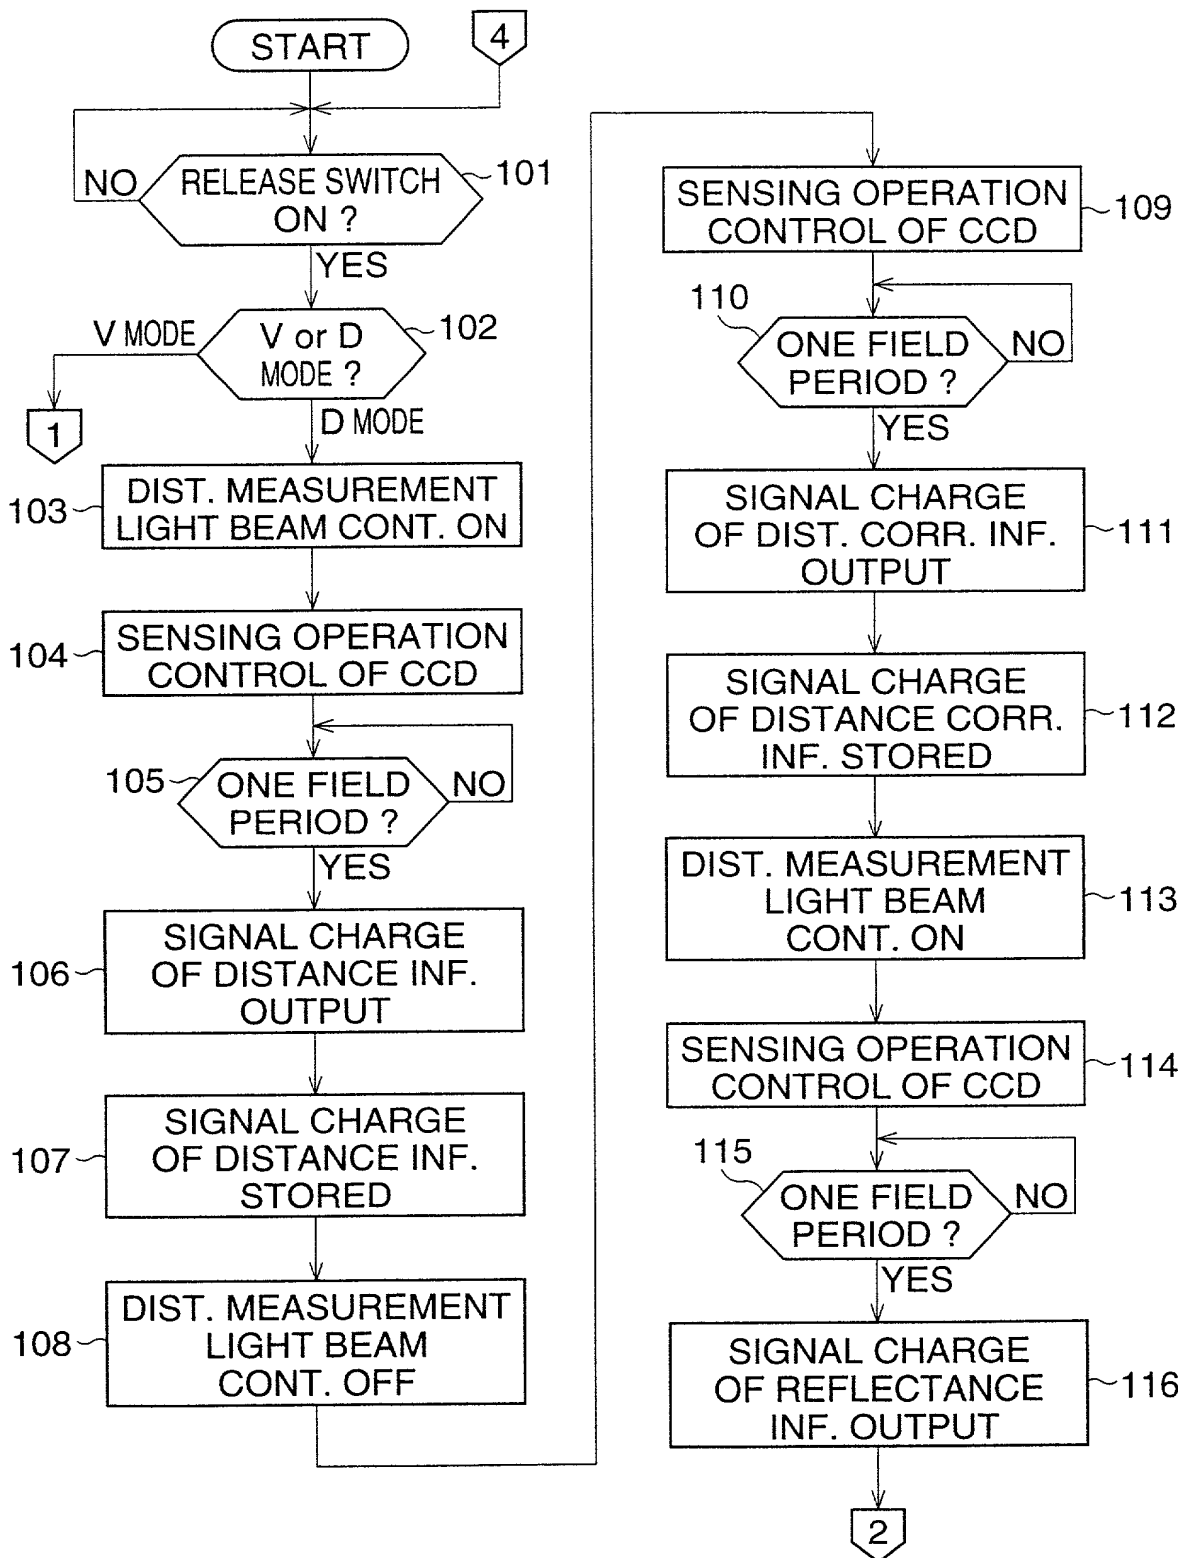


FIG. 12



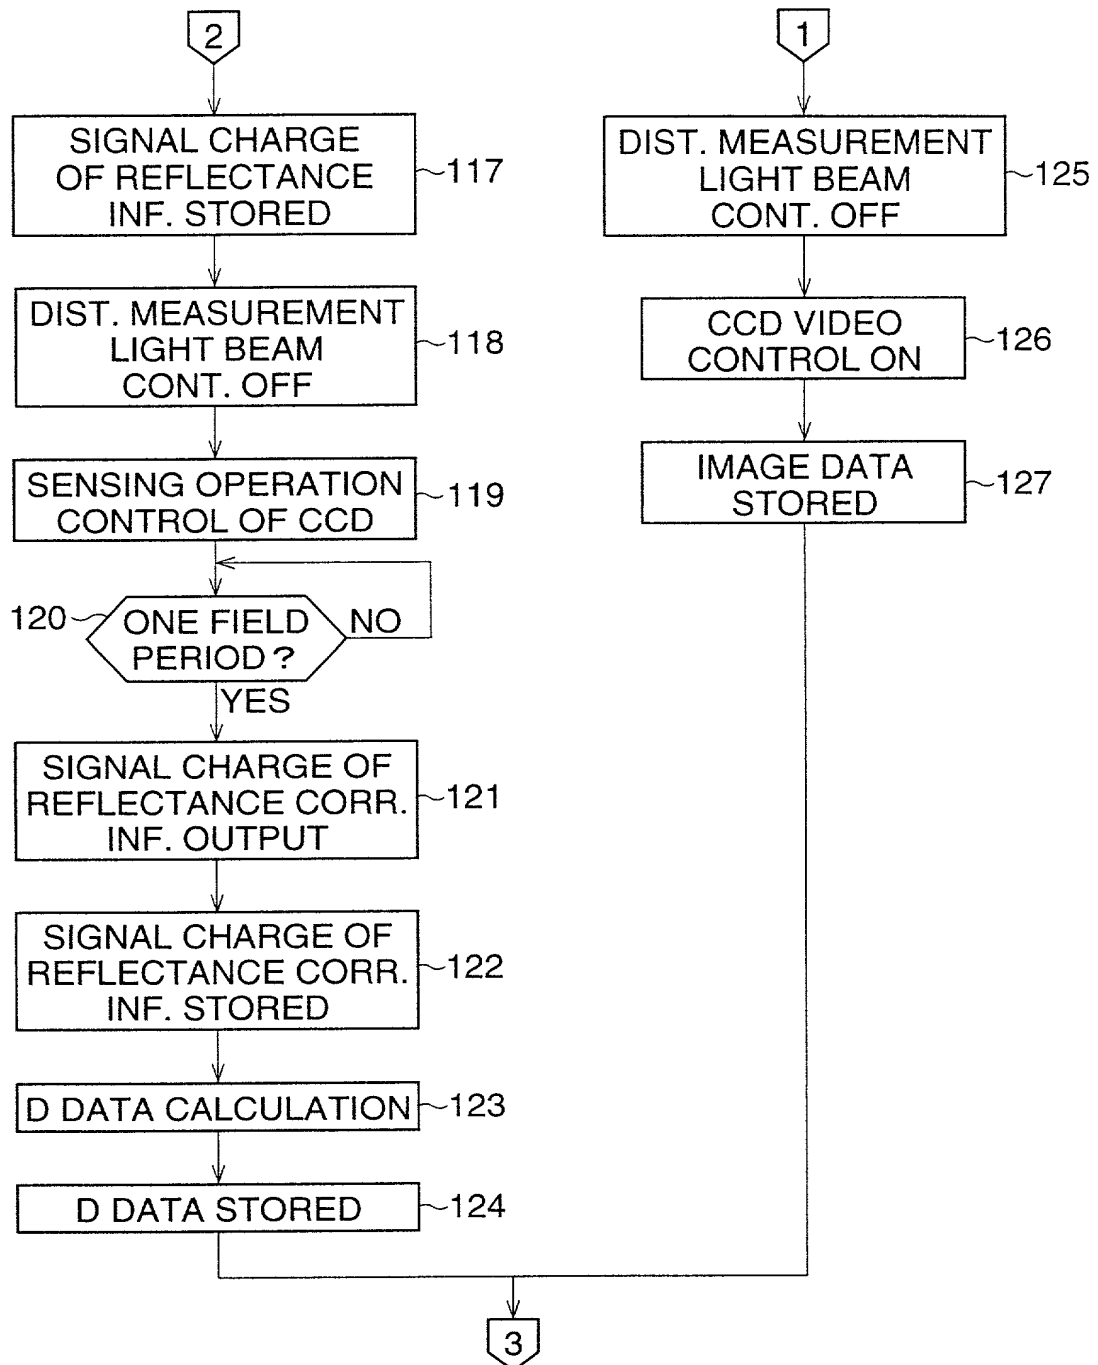


FIG. 14


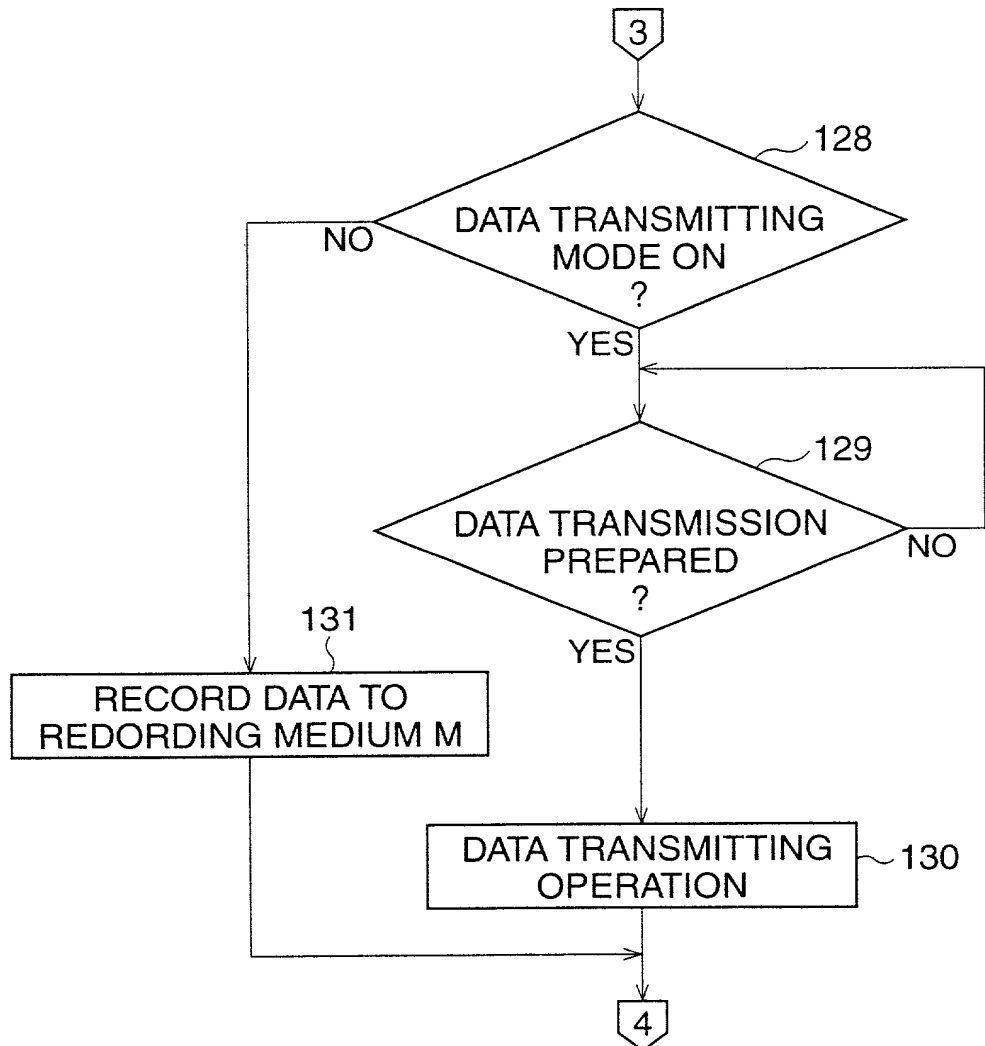


FIG. 15

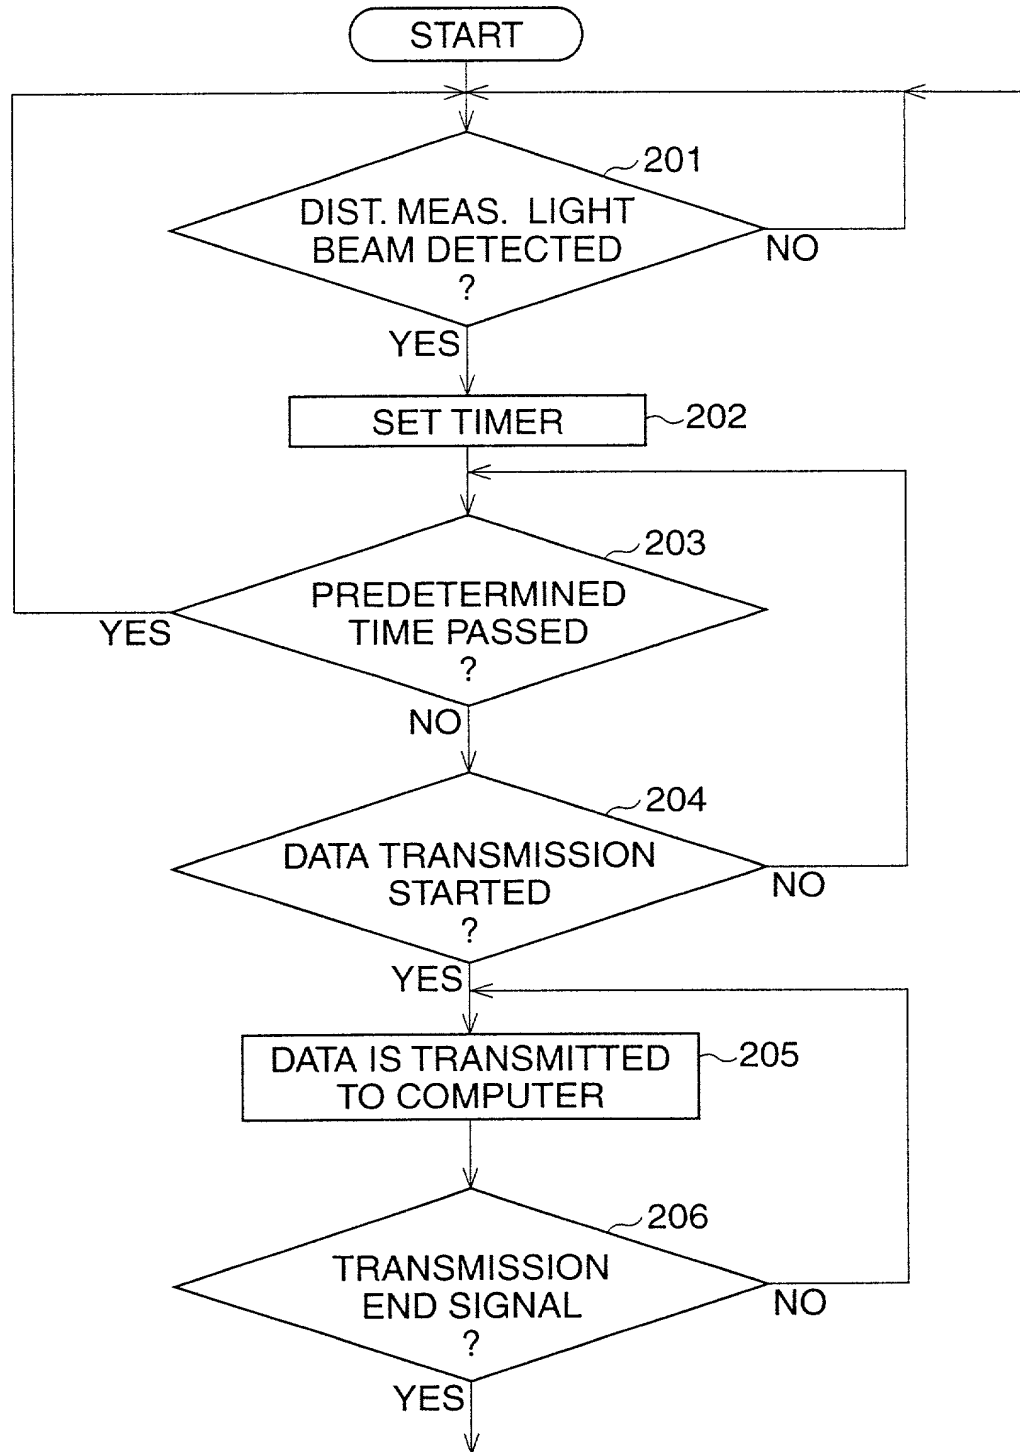

14/27
FIG. 16

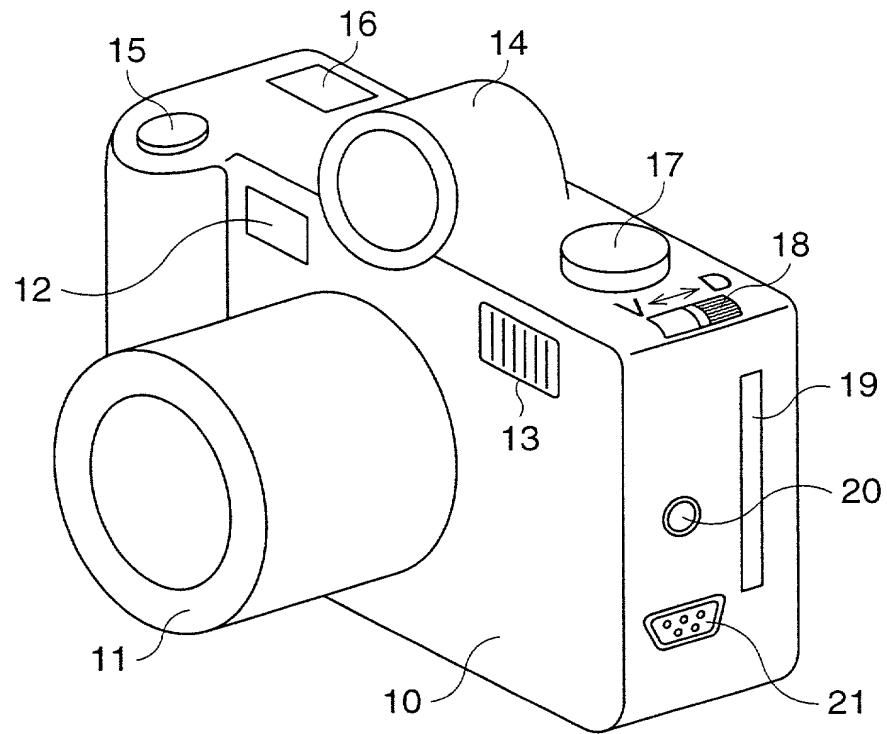


FIG. 18

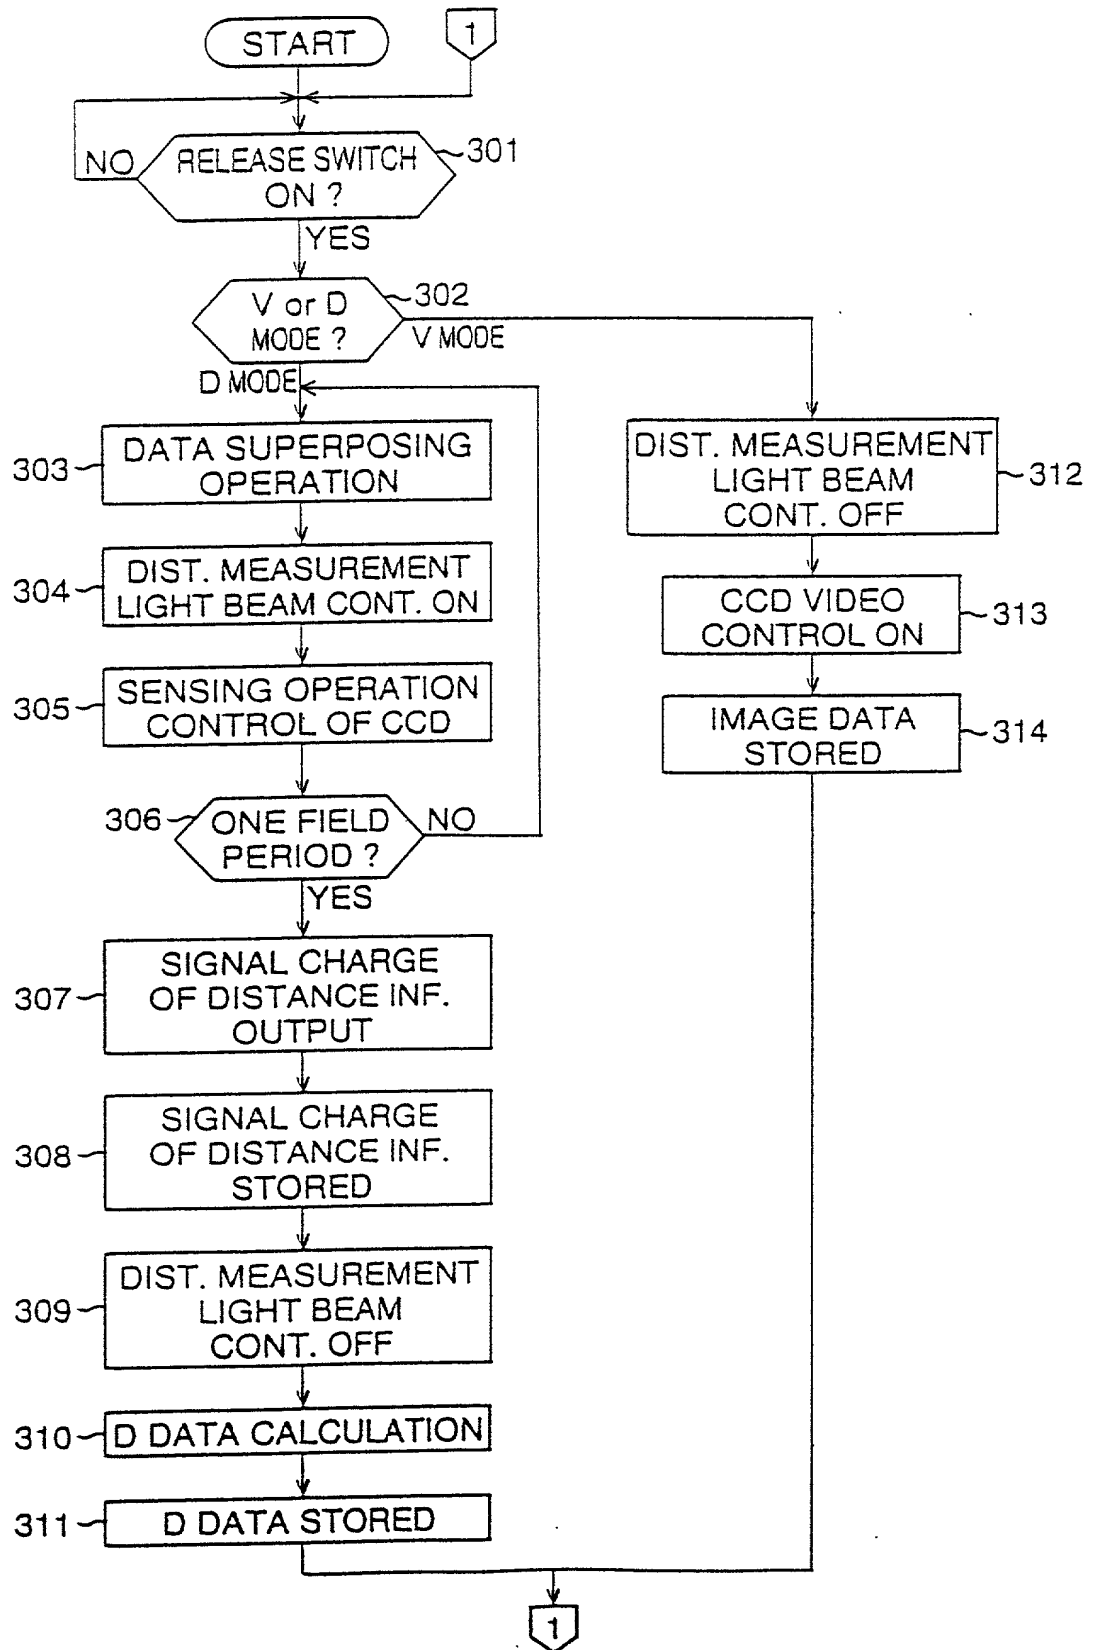


FIG. 19A

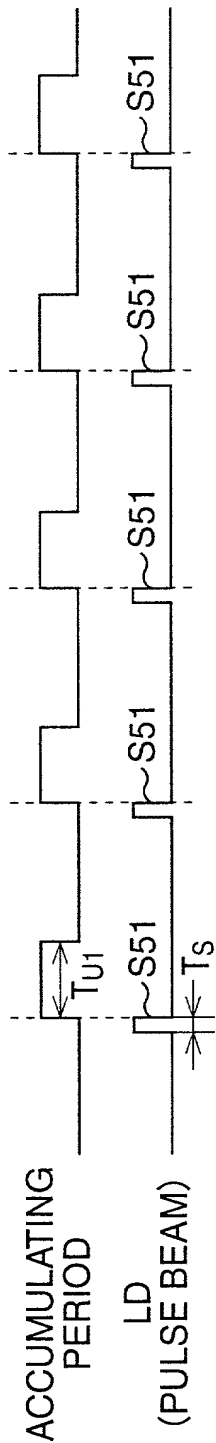


FIG. 19B

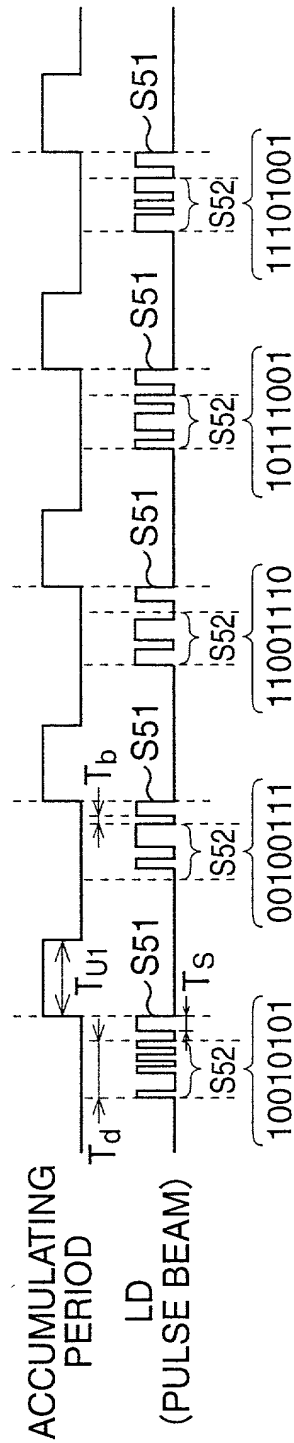


FIG. 20

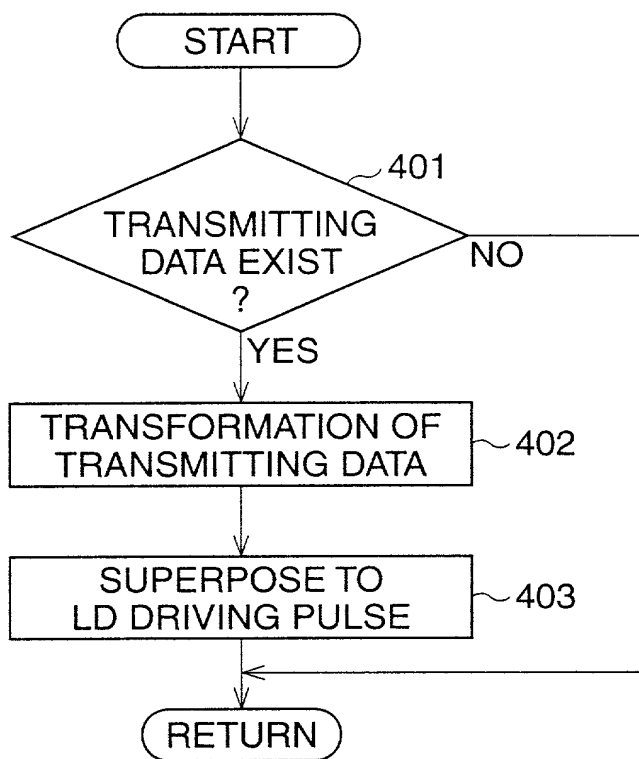


FIG. 21

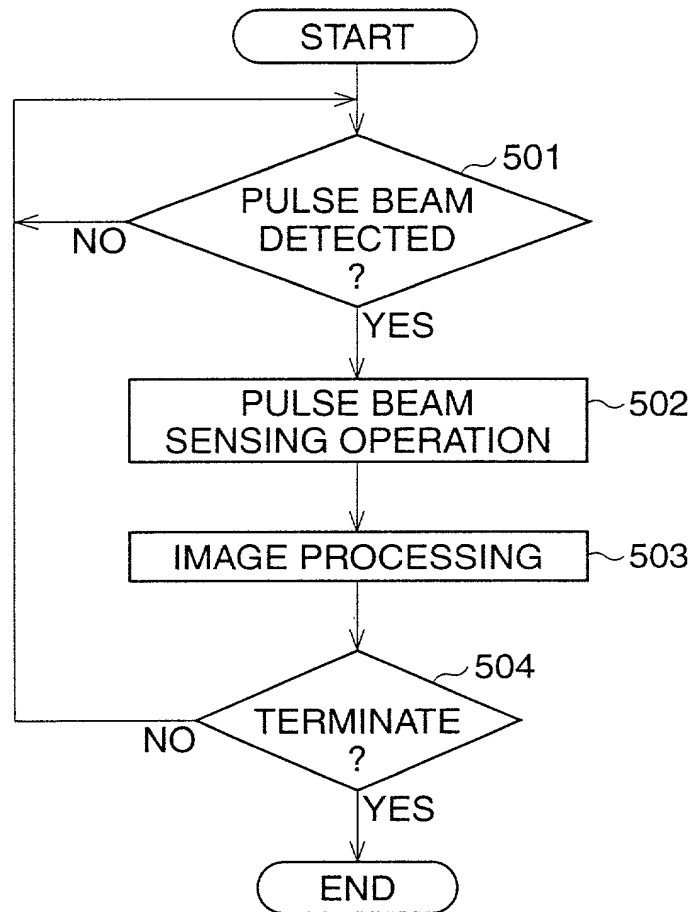


FIG. 22

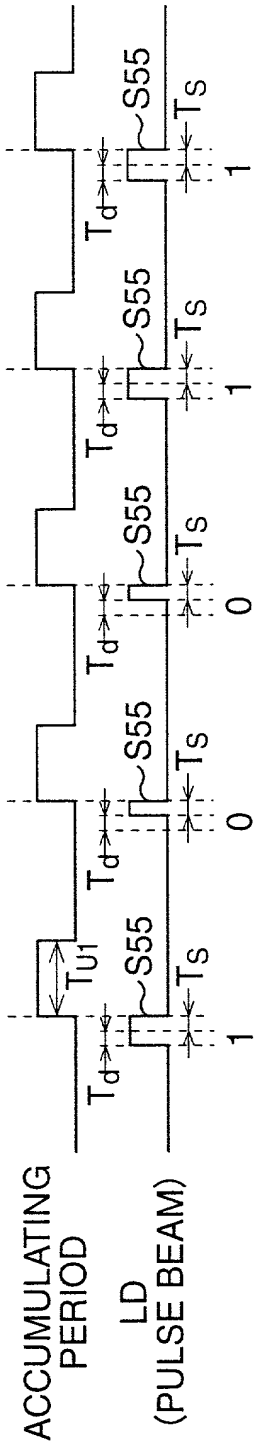


FIG. 23

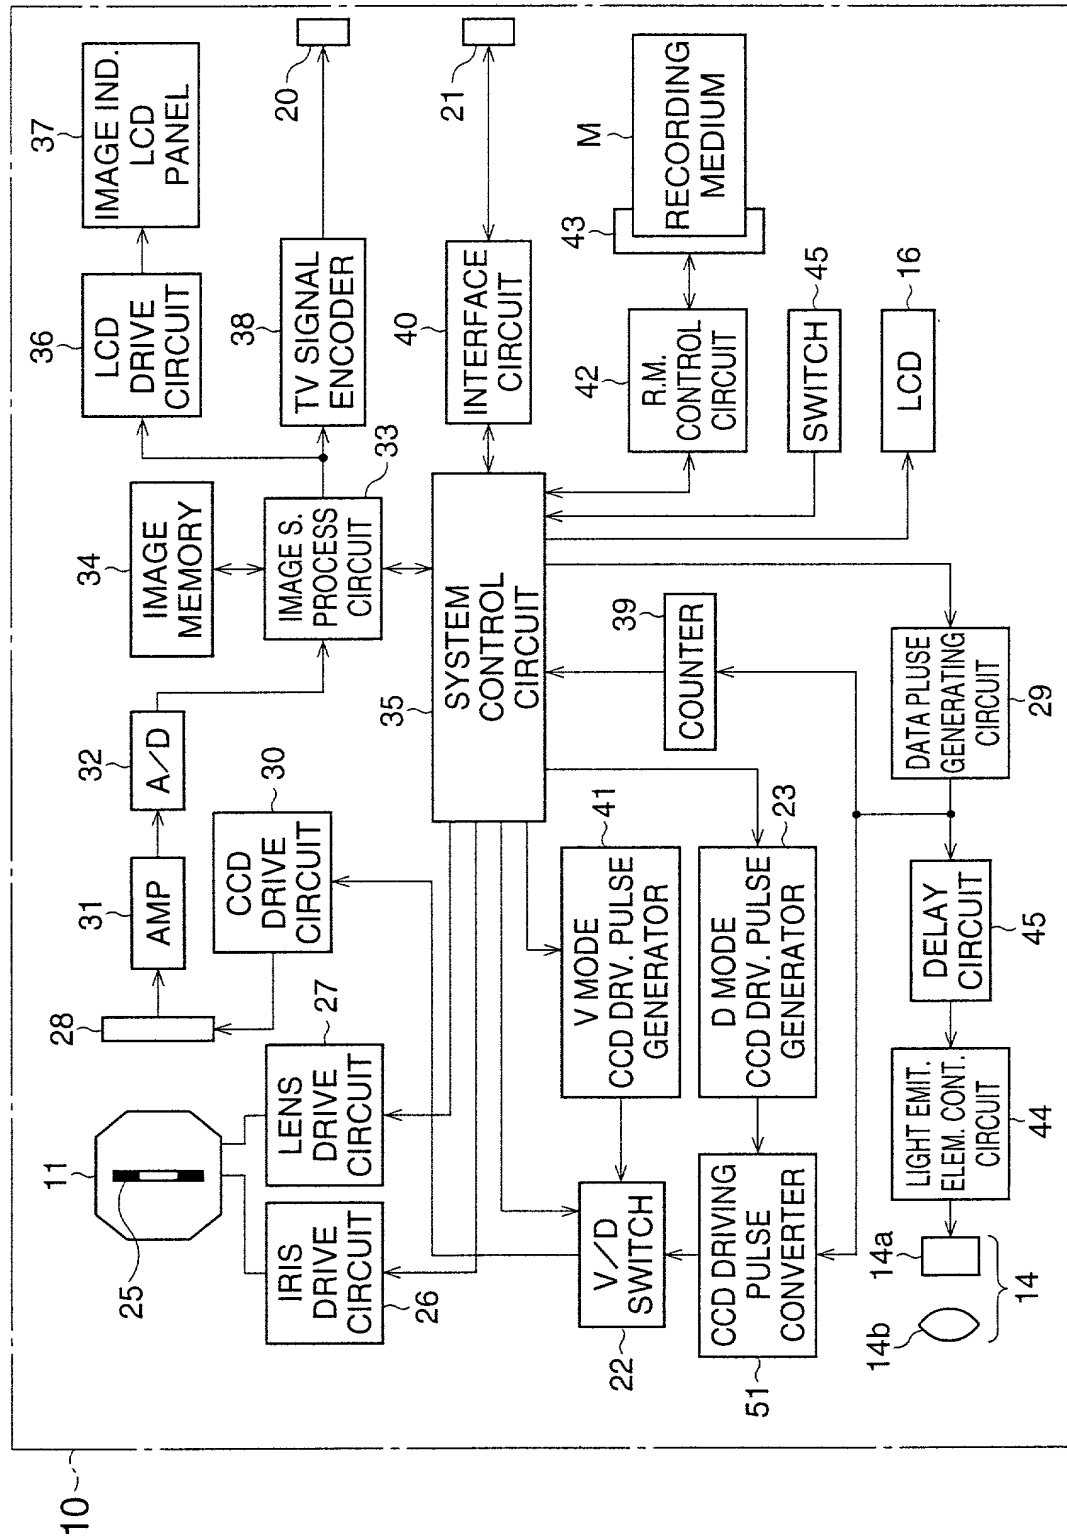
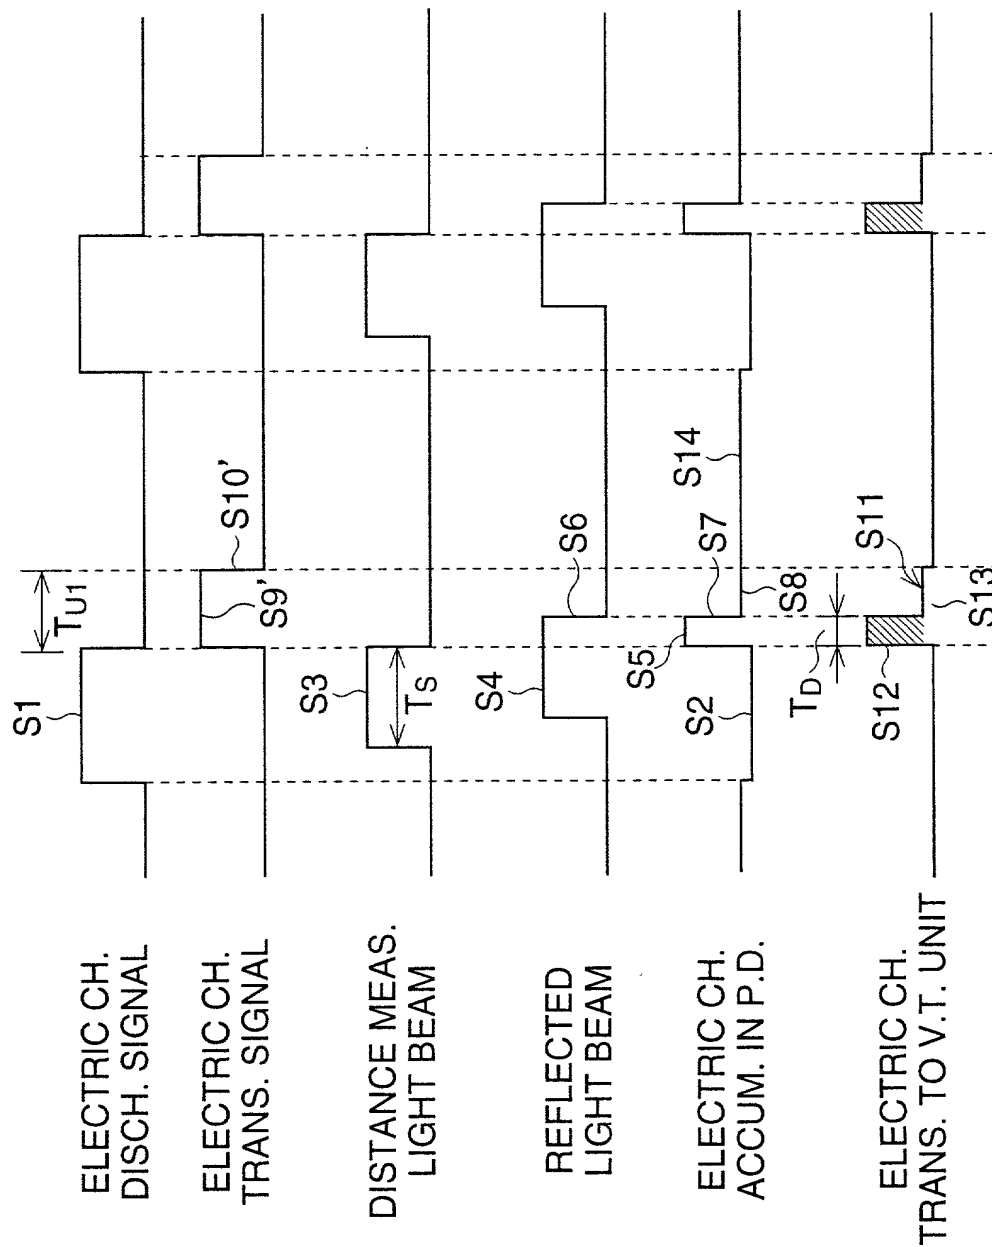


FIG. 24



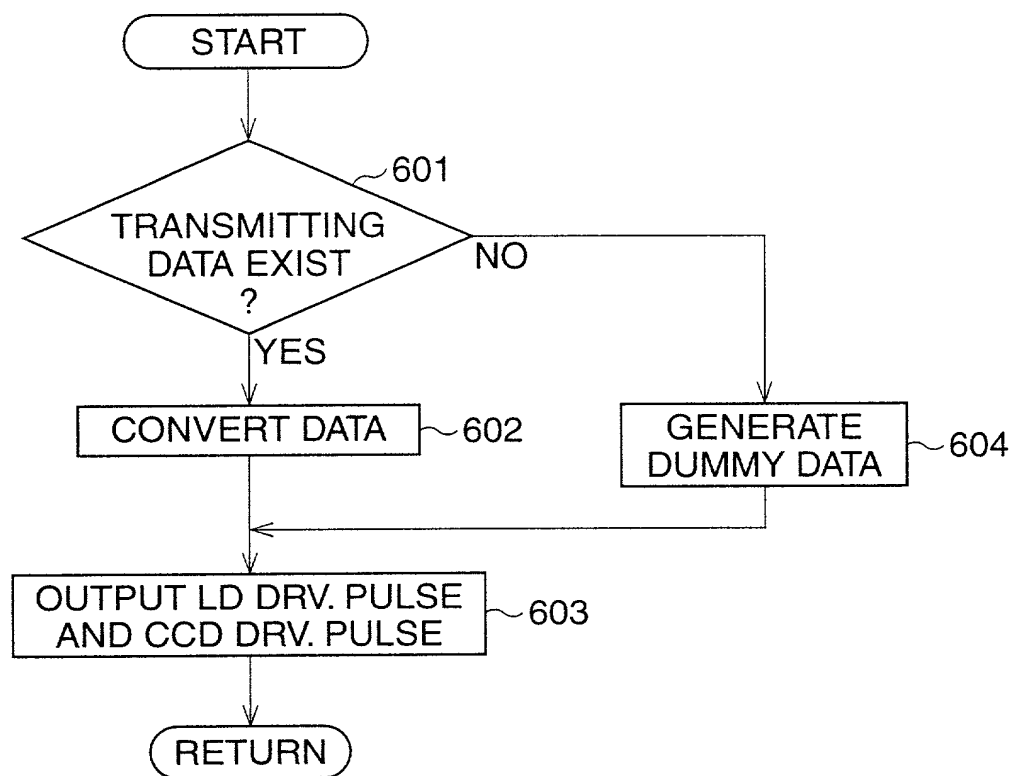


FIG. 27

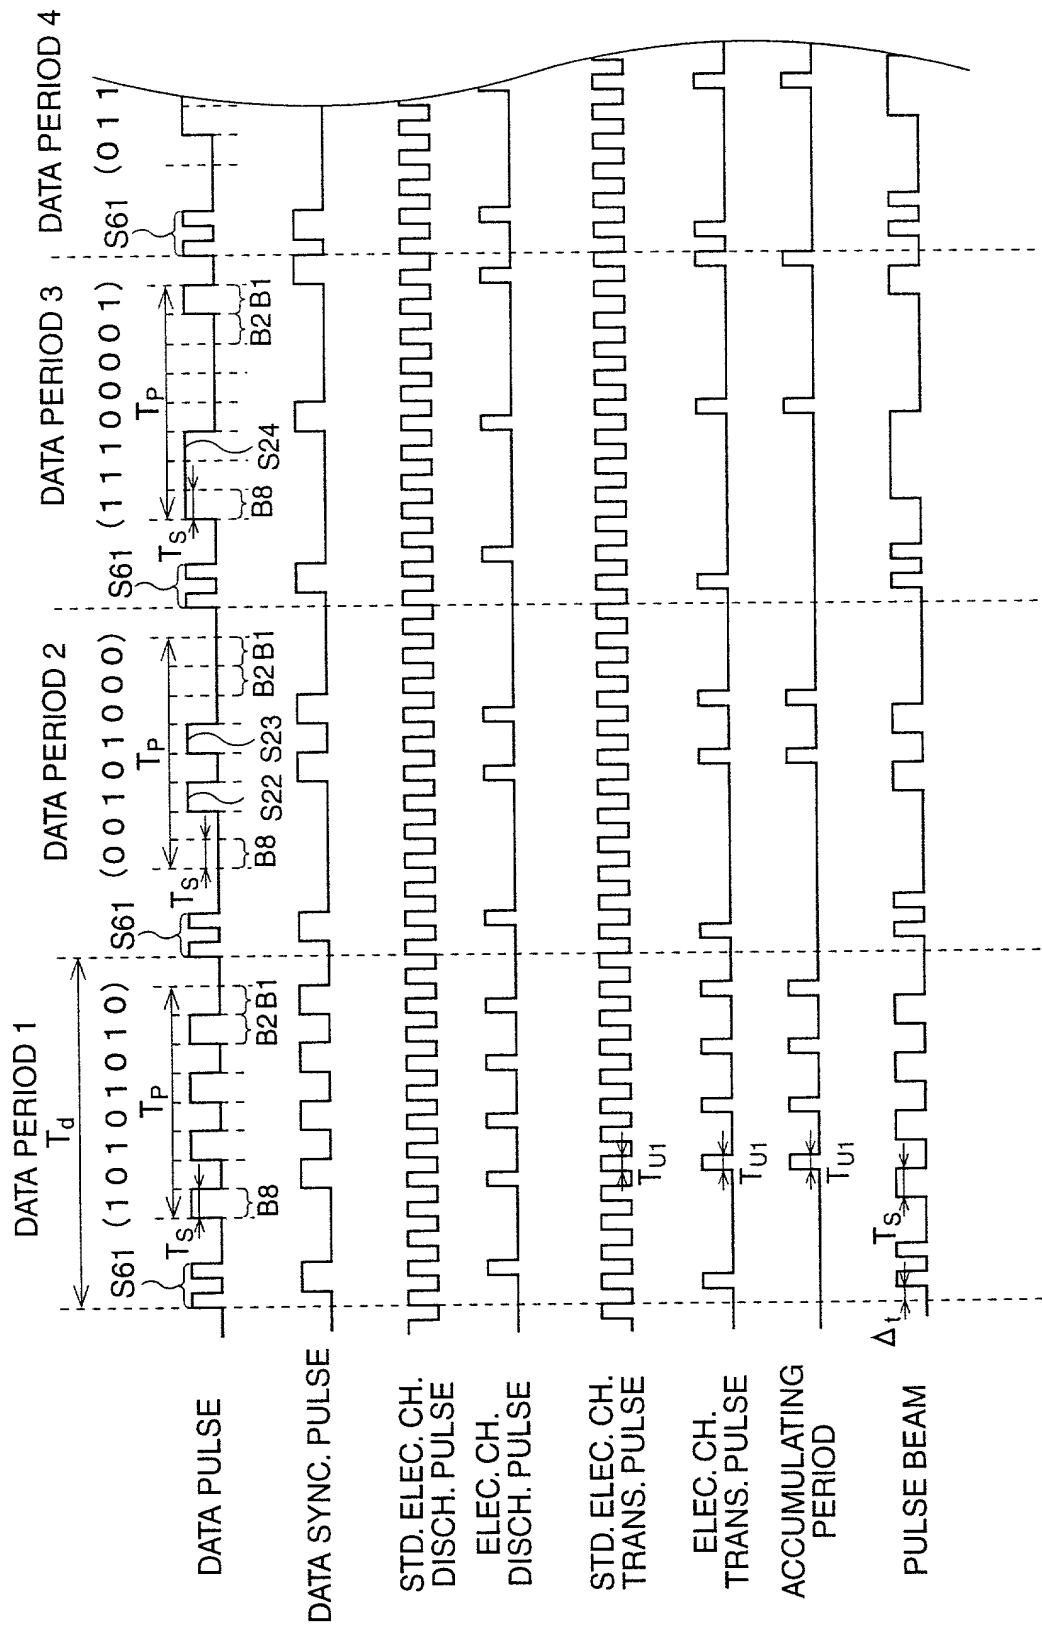


FIG. 28


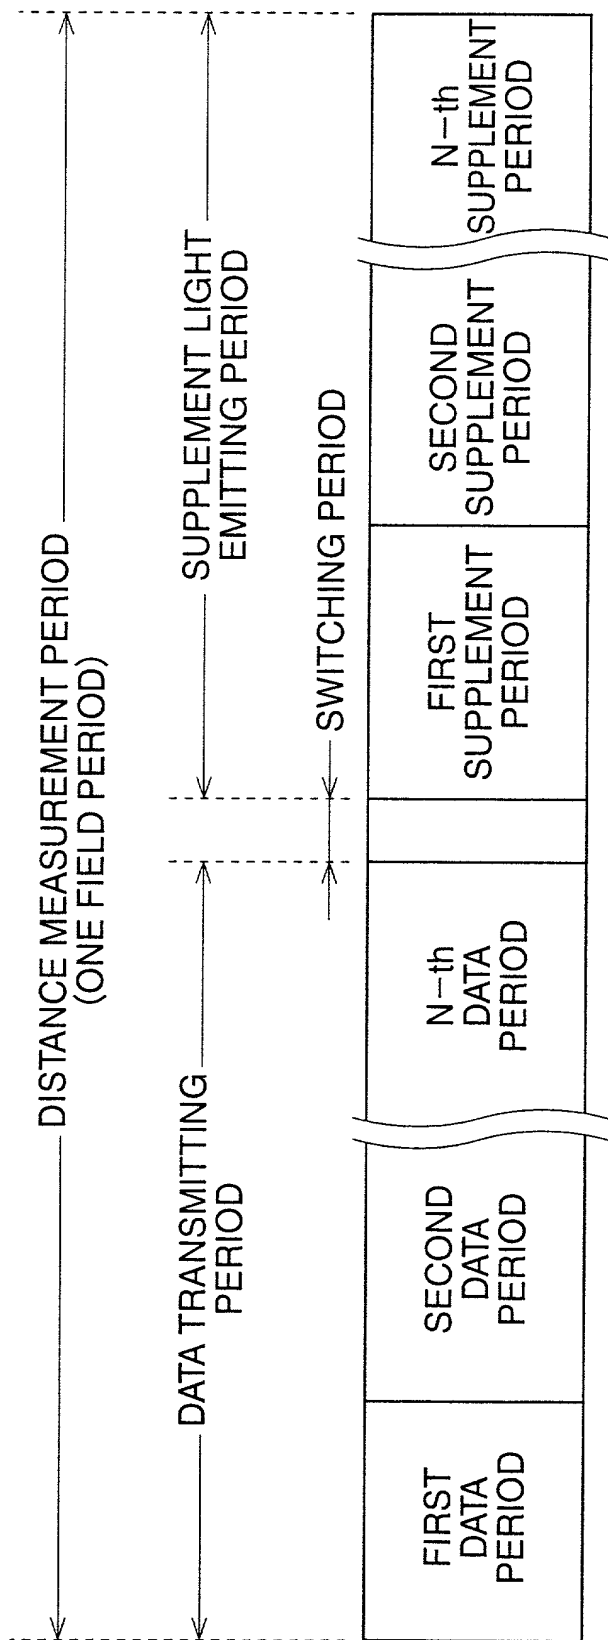


FIG. 29

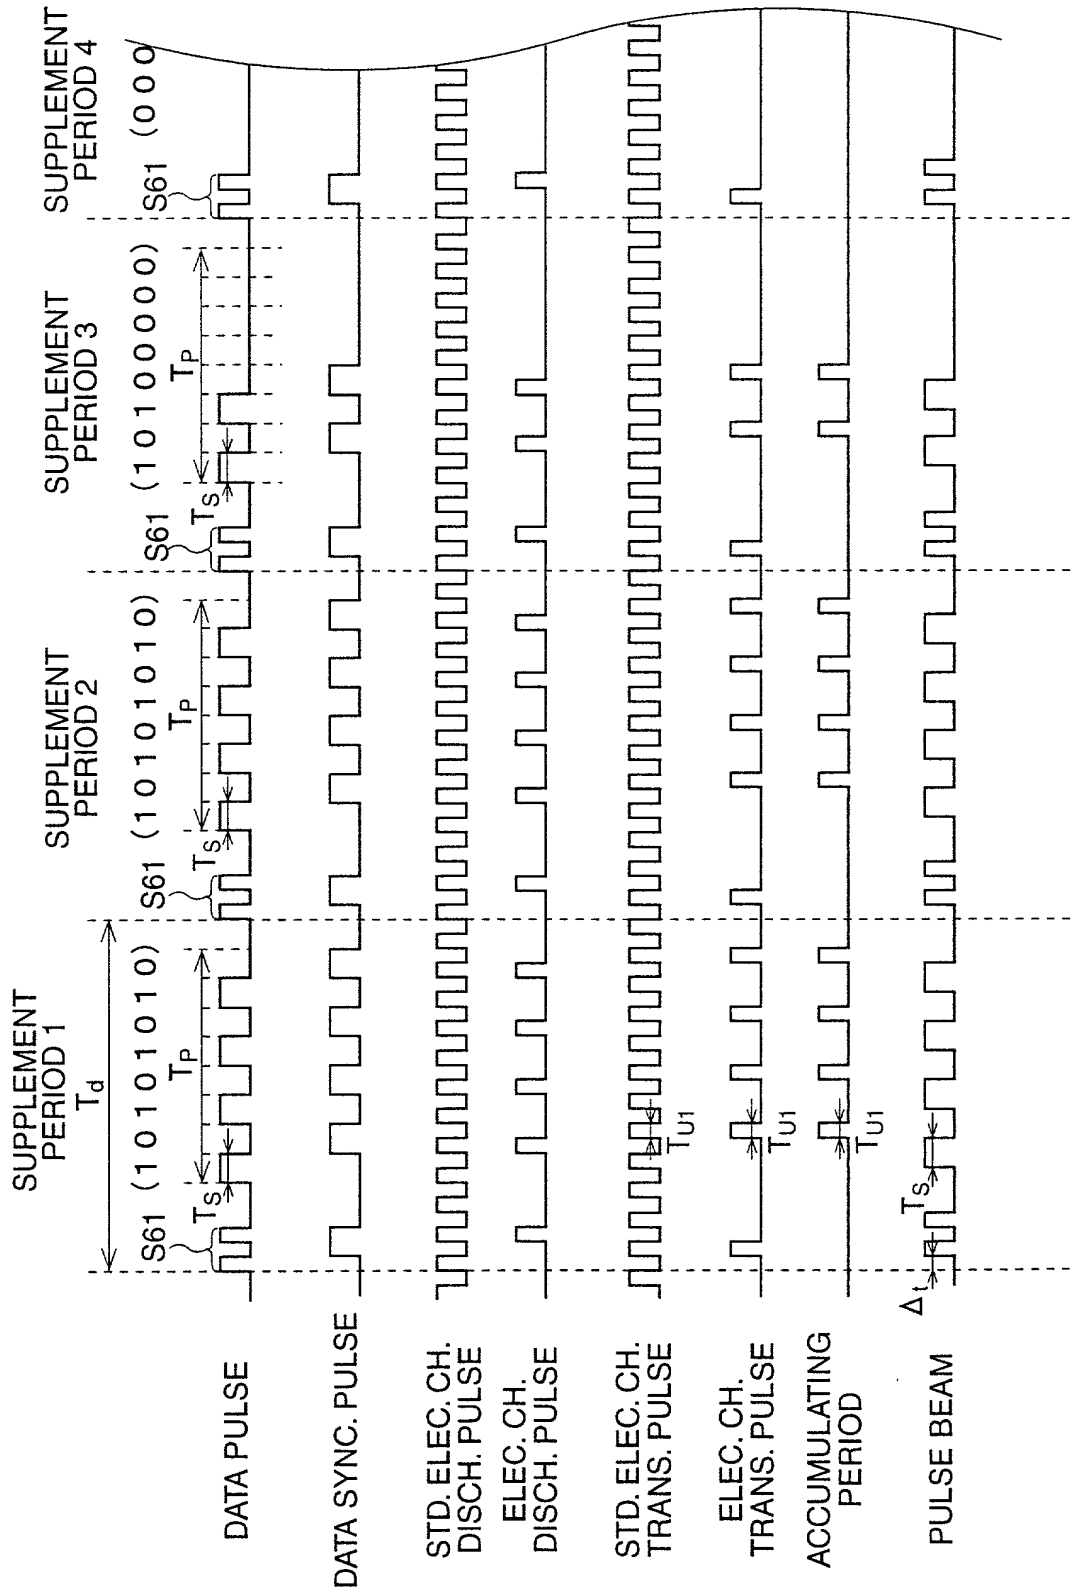

Declaration and Power of Attorney For Utility or Design Patent Application

特許出願宣言書

Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり
宣言する：

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおり
であり、

名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、
最初にして唯一の発明者である(一人の氏名のみが下欄に記載されている
場合)か、もしくは本来の、最初にして共同の発明者である(複数の氏名が
下欄に記載されている場合)と信じ、

その明細書を

(該当するほうに印を付す)

☐ ここに添付する。

☐ _____ 日に 出願番号

第 _____ 号として提出し、

_____ 日に補正した。

(該当する場合)

私は、前記のとおり補正した請求の範囲を含む前記明細書の内容を検討
し、理解したことを陳述する。

私は、連邦規則法典第37部第1章第56条に従い、本題の審査に所要の
情報を開示すべき義務を有することを認める。

私は合衆国法典第35部第119条(a-d)項又は第365条(b)項に基づき、下
記の外国特許出願又は発明者証出願、或いは第365条(a)項に基づき、少な
くとも米国以外の1ヶ国を指名したPCT国際出願の外国優先権利益を主張
し、更に優先権の主張に係わる基礎出願の出願日前の出願日を有する外国
特許出願、又は発明者証出願或いはPCT国際出願を以下に明記する：

Prior foreign applications
先の外国出願

P11-216449	Japan	30/July/1999
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)
P11-216987	Japan	30/July/1999
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)
P11-217061	Japan	30/July/1999
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated
below next to my name.

I believe I am the original, first and sole inventor (if only one name is
listed below) or an original, first and joint inventor (if plural names
are listed below) of the subject matter which is claimed and for
which a patent is sought on the invention entitled

THREE-DIMENSIONAL IMAGE CAPTURING DEVICE

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as

Application No. _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of
the above identified specification, including the claims, as amended
by any amendment referred to above.

I acknowledge the duty to disclose information which is material to
the examination of this application in accordance with Title 37, Code
of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States
Code §119(a-d) or §365(b) of any foreign application(s) for patent
or inventor's certificate, or §365(a) of any PCT international
application which designated at least one country other than the
United States of America, listed below and have also identified
below, by checking the "No" box, any foreign application for patent
or inventor's certificate, or of any PCT international application having
a filing date before that of the application on which priority is claimed:

Priority claimed
優先権の主張

<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No
あり	なし
<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No
あり	なし
<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No
あり	なし

Japanese Language Utility or Design Patent Application Declaration

☐ その他の外国特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35部第119条(e)項に基づく、下記の合衆国仮特許出願の利益を主張する。

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

(Number)
(番号)

(Day/Month/Year Filed)
出願の年月日

(Number)
(番号)

(Day/Month/Year Filed)
出願の年月日

(Number)
(番号)

(Day/Month/Year Filed)
出願の年月日

☐ その他の合衆国仮特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35部第120条に基づく下記の合衆国特許出願、又は第365条(c)項に基づく合衆国を指名したPCT国際出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35部第112条第1項規定の態様で、先の合衆国特許出願又はPCT国際出願に開示されていない限度において、先の出願の出願日と本願の国内出願日又はPCT国際出願日の間に有効となった連邦規則法典第37部第1章第56条に記載の特許要件に所要の情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application No.)
(出願番号)

(Day/Month/Year Filed)
(出願の年月日)

(現況)
(特許済み、係属中 放棄済み)

(Status)
(patented, pending, abandoned)

(Application No.)
(出願番号)

(Day/Month/Year Filed)
(出願の年月日)

(現況)
(特許済み、係属中 放棄済み)

(Status)
(patented, pending, abandoned)

☐ その他の合衆国又は国際特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional U.S. or international application numbers are listed on a supplemental priority sheet attached hereto.

私は、ここに自己の知識にもとずいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽による陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

私、下記署名者は、ここに記載の米国弁護士または代理人に本出願に関し特許商標庁にて取られるいかなる行為に関して、同米国弁護士又は代理人が、私に直接連絡なしに私の外国弁護士或いは法人代表者からの指示を受け取り、それに従うようここに委任する。この指示を出す者が変更の場合には、ここに記載の米国弁護士又は代理人にその旨通知される。

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

Japanese Language Utility or Design Patent Application Declaration

委任状： 私は、下記発明者として、下記に明記された顧客番号を伴う以下の弁護士又は、代理人をここに選任し、本順の手続きを遂行すること並びにこれに関する一切の行為の特許商標庁に対して行うことを委任する。そして全ての通信はこの顧客番号宛に発送される。

顧客番号 7055

現在選任された弁護士は下記の通りである。

Neil F. Greenblum	Reg. No. 28,394
Bruce H. Bernstein	Reg. No. 29,027
Roger P. Glass	Reg. No. 30,841
James L. Rowland	Reg. No. 32,674
Arnold Turk	Reg. No. 33,094

Address: **GREENBLUM & BERNSTEIN, P.L.C.**
1941 ROLAND CLARKE PLACE
RESTON, VA 20191

POWER OF ATTORNEY: As a named inventor, I hereby appoint the attorney(s) and/or agent(s) associated with the Customer Number provided below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

CUSTOMER NUMBER 7055

The appointed attorneys presently include:

直接電話連絡先：(名称および電話番号)

Direct Telephone Calls to: (name and telephone number)

GREENBLUM & BERNSTEIN, P.L.C.

(703) 716-1191

唯一のまたは第一の発明者の氏名	Full name of sole or first inventor	
	Shinichi KAKIUCHI	
同発明者の署名	日付	Inventor's signature Date
		Shinichi Kakiuchi July 26, 2000
住所	Residence	
	Saitama, Japan	
国籍	Citizenship	
	Japan	
郵便の宛先	Post Office Address	
	c/o ASAHI KOGAKU KOGYO KABUSHIKI KAISHA, 36-9, Maenochō 2-chome, Itabashi-ku, Tokyo, Japan	
第2の共同発明者の氏名 (該当する場合)	Full name of second joint inventor, if any	
	Shuzo SEO	
同第2共同発明者の署名	日付	Second Inventor's signature Date
		Shuzo Seo July 26, 2000
住所	Residence	
	Saitama, Japan	
国籍	Citizenship	
	Japan	
郵便の宛先	Post Office Address	
	c/o ASAHI KOGAKU KOGYO KABUSHIKI KAISHA, 36-9, Maenochō 2-chome, Itabashi-ku, Tokyo, Japan	

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)

Japanese Language Utility or Design Patent Application Declaration

第三の共同発明者の氏名	Full name of third inventor, if any Nobuhiro TANI	
共同発明者の署名	日付	Third Inventor's signature Nobuhiro Tani Date July 26, 2000
住所	Residence Tokyo, Japan	
国籍	Citizenship Japan	
郵便の宛先	Post Office Address c/o ASAHI KOGAKU KOGYO KABUSHIKI KAISHA, 36-9, Maenochō 2-chome, Itabashi-ku, Tokyo, Japan	
第四の共同発明者の氏名	Full name of fourth inventor, if any	
共同発明者の署名	日付	Fourth Inventor's signature Date
住所	Residence	
国籍	Citizenship	
郵便の宛先	Post Office Address	
第五の共同発明者の氏名	Full name of fifth inventor, if any	
共同発明者の署名	日付	Fifth Inventor's signature Date
住所	Residence	
国籍	Citizenship	
郵便の宛先	Post Office Address	
第六の共同発明者の氏名	Full name of sixth inventor, if any	
共同発明者の署名	日付	Sixth Inventor's signature Date
住所	Residence	
国籍	Citizenship	
郵便の宛先	Post Office Address	

(それ以降の共同発明者にたいしても同様な情報
および署名を提供すること。)

(Supply similar information and signature for subsequent joint
inventors.)